



Welcome to Bluebonnet Electric Cooperative

Bluebonnet Electric Cooperative Inc. was incorporated in 1939 as the Lower Colorado River Electric Cooperative. The name was changed to Bluebonnet Electric Cooperative, Inc. in 1964 to enhance a separate identity from the Lower Colorado River Authority (LCRA).

Bluebonnet is one of the largest electric cooperatives in Texas, with a 3,800 square mile service territory, which includes all or part of 14 counties, serving more than 120,000 meters. Five Member Service Centers are located throughout Bluebonnet's service territory to assist members with issues ranging from bill payment to service installation. A distribution cooperative, Bluebonnet purchases most of its power wholesale from LCRA. Bluebonnet operates and maintains over 12,000 miles of distribution lines. The organization owns 26 substations and purchases power at 22 additional substations owned by LCRA.

Bluebonnet provides this packet to all developers and their agents and it should be used as a guide in planning the installation of electrical equipment for receiving electrical power from Bluebonnet's distribution system.

The information presented is subject to change and will be revised periodically to reflect any changes which may develop. Please refer to our website at bluebonnet.coop for any additional information as well as an online source of this packet.

We look forward to working with you as your electrical provider.

Thank you,

Bluebonnet Project Coordination Staff

Table of Contents

Development Information Request Form	Page 3
Developer's Checklist	Page 4
Developer's Fees and Information	Page 5
➤ Development Fees	
➤ Street Lighting	
Easements/Right of Way	Page 6
➤ Front Lot / Back Lot Facilities	
Inspection Guidelines and Procedures	Page 7
Bluebonnet Specifications	Page 8
➤ Ditch and Conduit Placement	Page 9
➤ Road Crossing	Page 10
➤ Pad Mounted Switchgear Easement Requirements	Page 11
➤ Dimensions and Wiring Single-Phase Transformer	Page 12
➤ Dimensions and Wiring Single-Phase Sectionalizer	Page 13
➤ Three-Phase Transformer Pad 45-750 kVA	Page 14
➤ Three-Phase Transformer Pad 1000-2500 kVA	Page 15
➤ Dimensions for Three-Phase Sectionalizer 600A	Page 16
➤ Standard Residential Streetlight	Page 17-18
➤ Right-of-Way Clearing Guide	Page 19
➤ Dimensions for Pad Mounted Switchgear	Page 20
➤ Meter Loop Specifications (Multiple)	Page 23-39
➤ Material Standards	Page 40
➤ Timeline and Contacts	Page 41

Development Information Request Form

SUBDIVISION or PROJECT NAME: _____

LOCATION OF PROJECT: _____

DEVELOPER'S NAME: _____

REPRESENTED BY: _____ PHONE: _____

E-mail: _____

MAILING ADDRESS: _____

ENGINEERING FIRM: _____

REPRESENTED BY: _____ PHONE: _____

E-mail: _____

TYPE OF PROJECT: (Check all that apply)	SECTION (Insert Section #)	NUMBER OF LOTS (In this section)	TOTAL LOTS (In all sections)
<input type="checkbox"/> RESIDENTIAL	_____	_____	_____
<input type="checkbox"/> APARTMENTS	_____	_____	_____
<input type="checkbox"/> MOBILE HOME/RV PARK	_____	_____	_____
<input type="checkbox"/> COMMERCIAL	_____	_____	_____
<input type="checkbox"/> OTHER _____	_____	_____	_____

Taxing jurisdiction(s) and entities in which development falls (ie. City Limits, County, etc.) as well as physical (911) Address of Development _____

Estimated number of units to be constructed and occupied within the first 12 months. _____

Anticipated total project completion date. _____

Homebuilder & Contact Person _____ Phone # (____) _____

OTHER UTILITY PROVIDERS (Company Name)

- WATER _____
- GAS (YES or NO) _____
- CABLE _____
- TELEPHONE _____

LOAD EXPECTATIONS: (Check All That Apply)

- LIFT STATION/WASTE WATER PLANT
- WATER WELL
- HOME SIZES FROM _____ TO _____ SQ FT.
- AMENITY CENTER, PARKS, CLUB HOUSE
- COMMERCIAL SITES WITHIN DEVELOPMENT
- STREETLIGHTING – Responsible party for monthly lighting charges _____
- IRRIGATION SYSTEMS
- OTHER: _____

Upon completion of this form, please return via fax to (979)542-4150, attn: Project Coordination.

By signing this form, you are acknowledging receipt and understanding of this packet and you agree to abide and comply with all requirements and policies within.

Developer / Agent / Owner

Date

Developer's Checklist

Responsibility of Developer:

- Developer must fill out a Development Information Request Form and submit to Bluebonnet along with design fee if required.
- Developer is responsible for confirming all Bluebonnet easement requirements with Bluebonnet prior to platting.
- Developer must have an engineering firm submit preliminary plan of development in digital (AutoCAD) format to Bluebonnet Engineering Department. These plans must include streets, wet utilities, grading plans, and streetlight locations (if required) as well as any other utilities planned for said development.
- A design/re-design fee could be required either prior to or following the design process as a result of any changes to design out of original scope of project. This decision will be made at the discretion of Bluebonnet on a case by case basis. These fees are non-refundable and are subject to revision at Bluebonnet's discretion.
- Prior to Bluebonnet construction, two (2) hard copies of the approved plat must be submitted.
- Developer must provide and install all underground conduits at road crossings in the designated location per Bluebonnet Crossing Plans and if applicable, all electrical conduits in designated locations per Bluebonnet Construction Plans (see Bluebonnet Specifications in this packet). **If project design includes overhead primary lines and transformers in conjunction with underground meter pedestals, Developer may install road crossings ONLY. Bluebonnet contractors shall complete installation from road crossings to point of termination and this labor and material will be figured into the respective Contribution In Aid of Construction (CIAC).**
- Developer is responsible for following Bluebonnet inspection policies and procedures prior to and during conduit installation if using his own contractor (see Page 7).
- Property pins must be set and clearly visible at all lot corners, at developer's expense, prior to Bluebonnet commencing construction.
- Developer is responsible for submitting contribution-in-aid of construction to cover Bluebonnet's construction costs prior to Bluebonnet commencing construction. Bluebonnet's construction department will contact developer to communicate planned construction start date and duration following project being released for scheduling.
- Developer is responsible for all right-of-way clearing and grubbing to Bluebonnet specifications. Bluebonnet will clear the right-of-way for proposed overhead facilities for an additional charge to be quoted should developer choose this option. See attached Bluebonnet Specifications.
- Developer is responsible for ensuring conduit contractor and/or subcontractor adherence to all Bluebonnet Construction Specifications at all times.
- Developer to provide ALL materials necessary for the conduit system he installs for his Bluebonnet Underground System. Bluebonnet will own these materials after proper installation is certified by a Bluebonnet Inspector.

Developer's Fees and Information

Development Fees

1. A design/re-design fee of could be required either prior to or following the design process should the project change dramatically from its original scope. This decision will be made at the discretion of Bluebonnet on a case by case basis. These fees are non-refundable and are subject to revision at Bluebonnet's discretion.
2. Every request for design and every alteration to all scopes for design services may be considered as an individual request and, therefore are subject to additional fees to be determined by Bluebonnet.
3. When the developer or prospective developer enters into a line extension agreement with Bluebonnet for service, monies received for engineering design estimates of service will be applied to the cost of construction. Bluebonnet's Line Extension Policy can be found in the Bluebonnet Member Welcome Kit or on the "Residential Development" link on our website located at bluebonnet.coop .
4. If the developer or prospective developer does not notify Bluebonnet within a 180 day period of initial design with the intent to proceed, any design fees paid to date will be forfeited and the prospective project will be treated as new.
5. A maintenance fee of \$1 per linear foot of trench will be required at the time of contribution by the developer to cover the cost of any necessary repairs in the first year following the completion of Bluebonnet facilities installation.

Street Lighting

1. Bluebonnet agrees to install street lighting at locations within Site designated by the developer as needed to comply with City or County ordinances and regulations.
2. Bluebonnet does not offer any custom lighting solutions at this time. Bluebonnet will install our standard streetlight (see Bluebonnet Specifications in this packet) unless the developer wishes to install his own custom lighting. In this case, Bluebonnet will determine and provide a metering point(s) and the developer will be able to power his custom lighting facilities from this point(s). Developer will be responsible for all installation, operation, and maintenance of custom lighting facilities.
3. Bluebonnet will own, operate, maintain and repair the standard lighting facilities. The monthly charge for street lighting service will be according to the applicable rate schedule for lighting service in the Bluebonnet Electric Cooperative Tariff. Payment of the monthly charge for street lighting service will be the responsibility of the developer or an entity designated by the developer.

Easements / Right of Way

1. Bluebonnet shall be granted, at no cost and in writing on recorded plat, all rights-of-way and easements necessary to serve member, overhead or underground for the erection, maintenance, repair, replacement, removal, or use of all wires, poles, machinery, fixtures, or equipment needed to supply and deliver electric service to the member.
2. Bluebonnet does not allow any member equipment or material to be attached to its property, except where said equipment and/or materials are required to provide electrical service and said equipment and/or material has been authorized by Bluebonnet.
3. Developers and their respective Homebuilders must give Bluebonnet the rights, privileges and easements necessary to construct, operate, repair, replace and perpetually maintain electric facilities located on the member's owned or leased property, and in or on all streets, roads or highways abutting their property. All service lines providing members with electricity and all switches, meters and other appliances and equipment constructed or installed on the property belong solely to Bluebonnet, and Bluebonnet can access the property to repair or service them and, upon discontinuance of service, remove them.
4. Bluebonnet shall, at any time deemed necessary, access any equipment owned and/or operated by Bluebonnet. Any obstructions in a platted public utility easement or exclusive Bluebonnet easement such as landscaping, trees, fences, etc. will be removed if discovered by necessity or inspection. Developers and their respective Homebuilders will adhere to equipment clearance requirements noted in attached specifications AND on equipment labels. If the existing items mentioned above are removed, damaged, etc. by Bluebonnet, Bluebonnet expresses no guarantee, written or implied, that these items will be repaired or replaced. Requests for replacement or repair of landscaping, grass, trees, soil, etc. will be addressed and ruled on by Bluebonnet on a case by case basis. Bluebonnet will make every attempt to disturb existing items as little as possible granted their locations do not violate NESC, NEC, or Bluebonnet clearance requirements.

Front Lot Facilities / Back Lot Facilities

All overhead or underground distribution lines in a subdivision will be built on the front lot lines along public streets. Lines can be constructed along rear lot lines if the following conditions exist.

1. There is an accessible roadway from a public road (dedicated to the public or Bluebonnet) along the route of the proposed distribution line. The dedication will include language that prohibits obstructions being placed in the roadway that would prevent ready access, including but not limited to, fences, storage buildings, etc. and are required to be recorded in the deed restrictions for the applicable area(s).
2. The accessible, dedicated roadway will be an all-weather road, thirty (30) feet in width and constructed of asphalt, concrete, or crushed rock.
3. An all-weather road is defined with adequate culverts, bridges, and base material to support vehicles weighing up to 50,000 pounds during all weather conditions.

Inspection Guidelines and Procedures

1. Developer to provide all pertinent conduit contractor information to Bluebonnet Project Coordinator prior to conduit installation. Bluebonnet Project Coordinator will provide all pertinent Bluebonnet Inspector information to developer.
2. Developer will schedule and conduct a pre-construction meeting between Bluebonnet Inspector and contractor, who will install conduit at a time mutually agreeable to all parties involved.
3. Contractor foreman will review Bluebonnet construction specifications and acknowledge review and receipt prior to trenching and conduit installation.
4. Bluebonnet will respond within 48 hours of contractor notification prior to intended trenching times so inspection dates and times can be coordinated.
5. Trenches will remain open until inspected and approved by Bluebonnet inspector. Upon inspection, contractor will be advised as to what may or may not be backfilled.
6. Bluebonnet retains the right to terminate any conduit installation if inspection reveals non-compliance with Bluebonnet inspection policies, procedures, or specifications until said issues are resolved and approved through re-inspection.
7. Bluebonnet Inspector will inspect all road crossings as they are being installed by Road Contractor.
8. Equipment pad installation and conduit stubs must meet clearance requirements on all sides as outlined in Bluebonnet Specifications.
9. Developer must ensure that his conduit contractor cooperates with Bluebonnet's Inspector and corrects any problems noted. Otherwise, the Bluebonnet certification of the conduit system will be withheld and Bluebonnet's installation of electrical facilities cannot commence. Developers who fail to facilitate prompt resolution to conduit installation problems noted by Bluebonnet's Inspector will not be allowed to install conduit for Bluebonnet on existing or future projects.
10. Developer or his/her contractor is responsible for acquiring any and all permits and remitting any necessary fees for trench and conduit installation (excavation plans, traffic control plans, digging permits, etc.)

BLUEBONNET INSPECTORS

Carl Miller – 979-540-6495, carl.miller@bluebonnet.coop

Jose Hernandez – 720-670-7299 jose.hernandez@bluebonnet.coop

Tim Mittasch – 979-540-7159 tim.mittasch@bluebonnet.coop

Kenneth Roush – 512-468-5088 kenneth.roush@bluebonnet.coop

Jose Villarreal – 512-988-1885 jose.villarreal@bluebonnet.coop

Martin Dorantes – 512-748-4453 martin.dorantes@bluebonnet.coop

Bluebonnet Specifications

Ditch and Conduit Placement
Road Crossing
Pad Mount Switchgear Easement Requirements
Dimensions and Wiring Single-Phase Transformer
Dimensions and Wiring Single-Phase Sectionalizer
Three-Phase Transformer Pad 45-750 kVA
Three-Phase Transformer Pad 1000-2500 kVA
Dimensions for Three-Phase Sectionalizer 600A
Standard Residential Streetlight
Right-of-Way Clearing Guide
Switchgear Dimensions and Installation
Meter Loop Specifications (Multiple)


Additional Notes

Underground electrical lines in residential developments (including apartment complexes and any commercial service) shall be looped to accommodate the ability to feed from two or more directions so that in the event of an outage the most number of customers can be provided power until the failed line or equipment is restored. Avoid looping back in the same ditch. Never loop back to the same riser pole, sectionalizing cabinet, or switchgear.


Developments with lots greater than 1.5 acre are required to be designed with sectionalizers at the front lot lines within the PUE or BBEC Easement.

DITCH AND CONDUIT PLACEMENT NON-ROAD CROSSING


**DITCH ASSIGNMENT
FRONT VIEW**

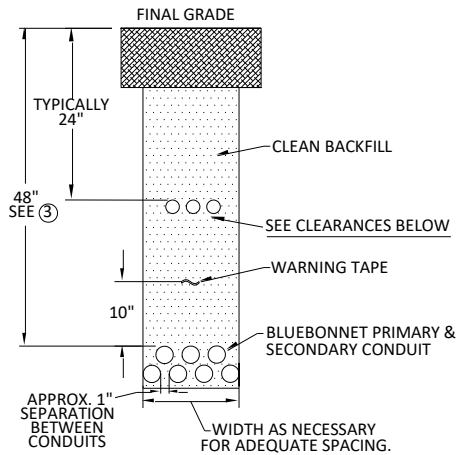


**CONDUIT STUB-UP
SIDE VIEW**

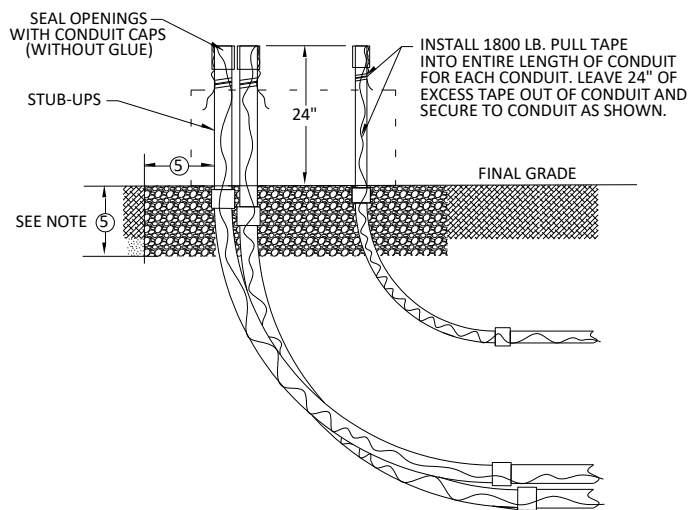

**CONDUIT CLEARANCES
FRONT VIEW**

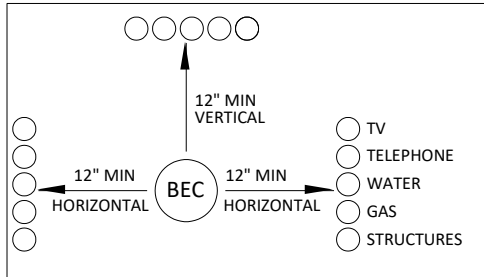

**CONDUIT STUB-UP CLEARANCES
TOP VIEW**

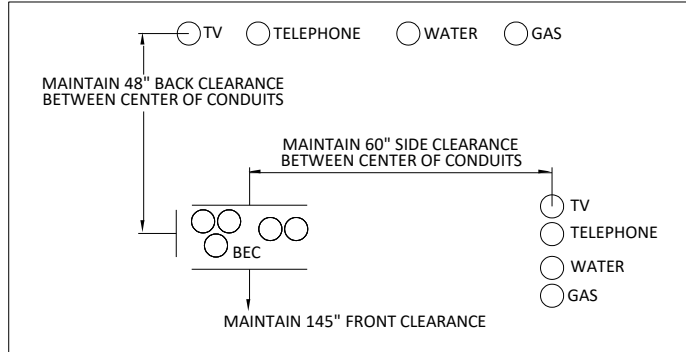

ANY CONDUITS STUBBED OUT FOR FUTURE USE SHALL EXTEND A MINIMUM OF 5' FROM EQUIPMENT. ENDS SHALL BE MARKED WITH 3" DIAMETER GREY PVC CONDUIT, EXTENDING 4' ABOVE GRADE AND PAINTED RED.

NOTES:

1. CONDUIT SHALL BE GREY SCHEDULE 40 PVC. | PRIMARY & SECONDARY= 3" | LIGHTING= 2"
2. CONDUIT ELBOW: PRIMARY & SECONDARY= 90°, 48" SWEEP | STREETLIGHT = 90°, 24" SWEEP
3. NORMAL DITCH COVER DEPTH IS 48". ADJUSTMENTS MAY BE MADE TO 48" DEPTH IF NECESSARY UPON BLUEBONNET APPROVAL.
4. SEPARATION FROM OTHER UTILITIES SHALL BE 12" MINIMUM OR SUFFICIENT TO PREVENT ANY FORESEEN DAMAGE OF EITHER FACILITY TO THE OTHER.
5. GRAVEL FOR PADS SHALL BE 3/8" WASHED PEA GRAVEL. DEPTH AND WIDTH SHALL BE TO EQUIPMENT SPECIFICATION.




Drawn:	Approved:	Date:
CV	Project Coordinators	Oct. 31, 2019

UNDERGROUND DISTRIBUTION


J-3

DITCH AND CONDUIT PLACEMENT ROAD CROSSING


**CONDUIT
FRONT VIEW**

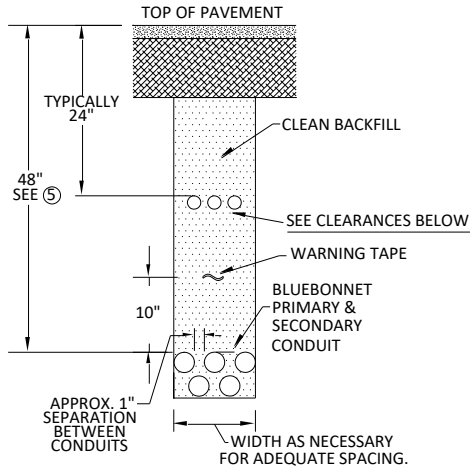


**CONDUIT
SIDE VIEW**

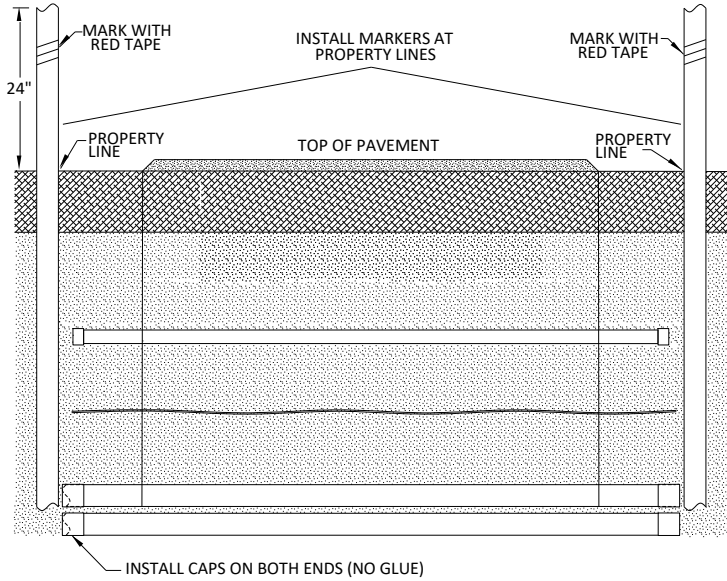

**CONDUIT CLEARANCES
FRONT VIEW**

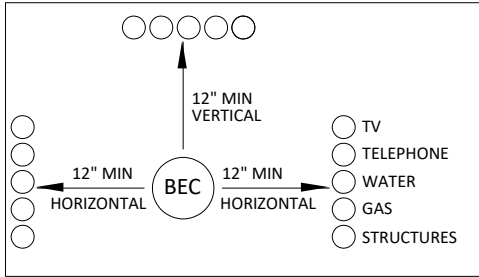

**CONDUIT STUB-UP CLEARANCES
TOP VIEW**

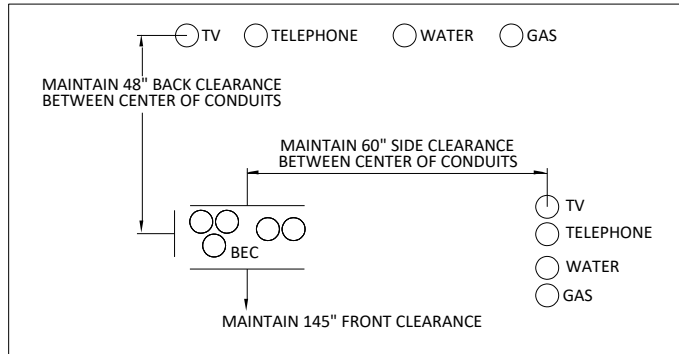

ANY CONDUITS STUBBED OUT FOR FUTURE USE SHALL EXTEND A MINIMUM OF 5' FROM EQUIPMENT. ENDS SHALL BE MARKED WITH 3" DIAMETER GREY PVC CONDUIT, EXTENDING 4' ABOVE GRADE AND PAINTED RED.

NOTES:

1. STATE AND LOCAL CODES MAY REQUIRE DIFFERENT STANDARDS, IN WHICH CASE THE MOST STRINGENT CODE SHALL TAKE PRECEDENCE.
2. CONDUIT SHALL BE MINIMUM GRAY SCHEDULE 40 PVC. | PRIMARY & SECONDARY = 3" | LIGHTING = 2"
3. CONDUIT ELBOW: PRIMARY & SECONDARY = 90°, 48" SWEEP | LIGHTING = 90°, 24" SWEEP
4. LENGTH OF CONDUITS SHALL BE FROM PROPERTY LINE TO PROPERTY LINE.
5. NORMAL COVER DEPTH IS 48". ADJUSTMENTS MAY BE MADE TO 48" DEPTH IF NECESSARY UPON BLUEBONNET APPROVAL.




Drawn:	Approved:	Date:
CV	Project Coordinators	Oct. 31, 2019

UNDERGROUND DISTRIBUTION


J-4

BLUEBONNET ELECTRIC COOPERATIVE REQUIREMENTS FOR SWITCHING EQUIPMENT PLACEMENT

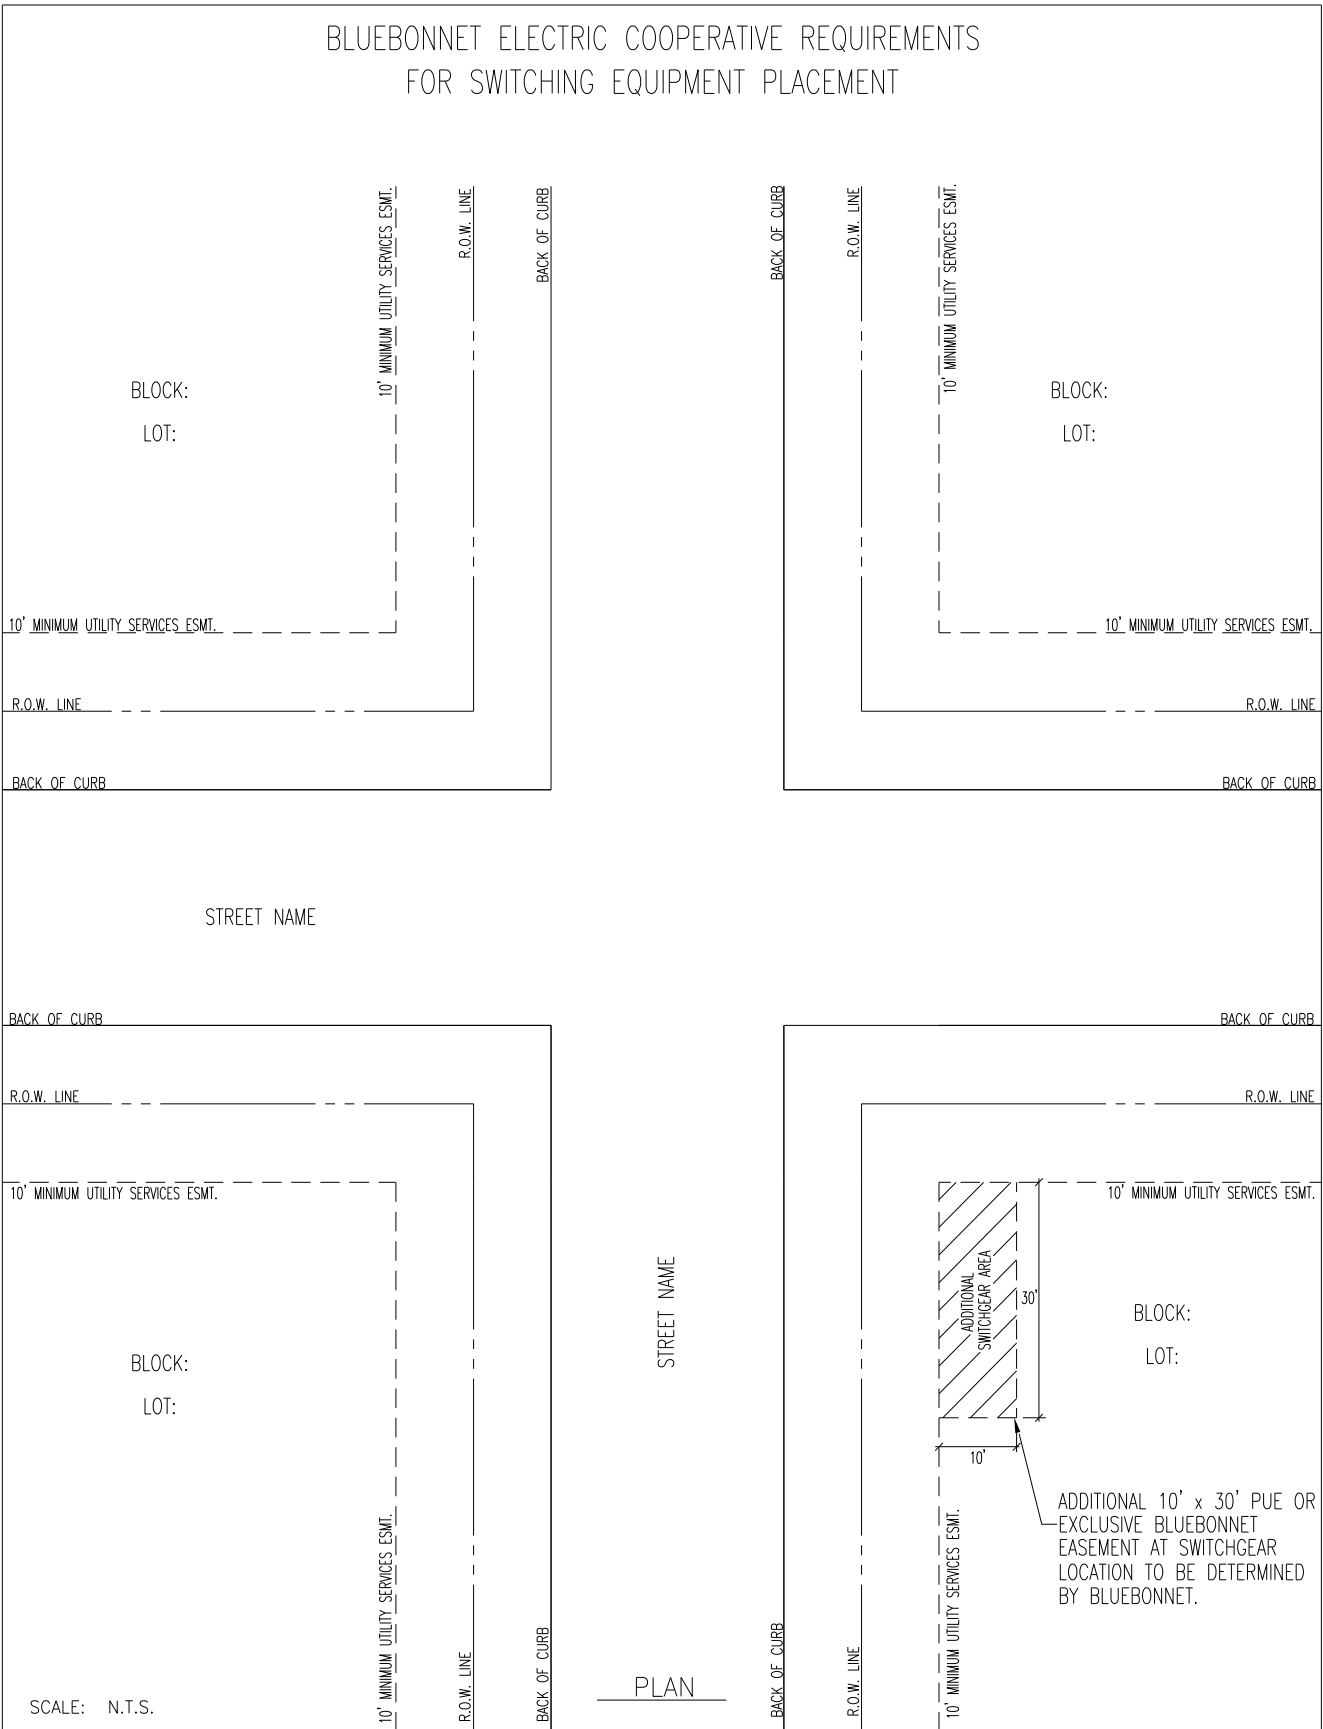


1PH PADMOUNT SECTIONALIZER DIMENSIONS AND WIRING


TOP VIEW

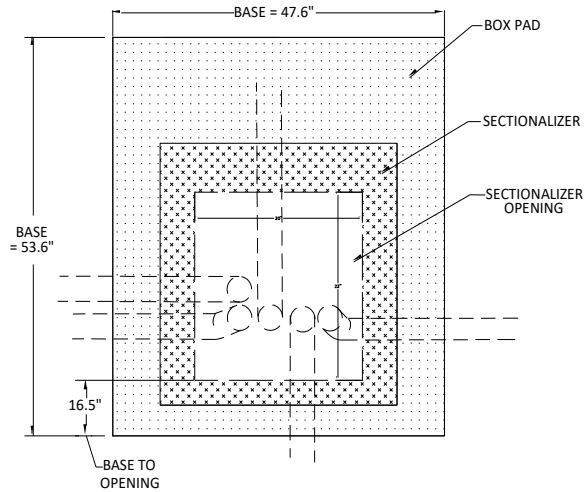

SIDE VIEW

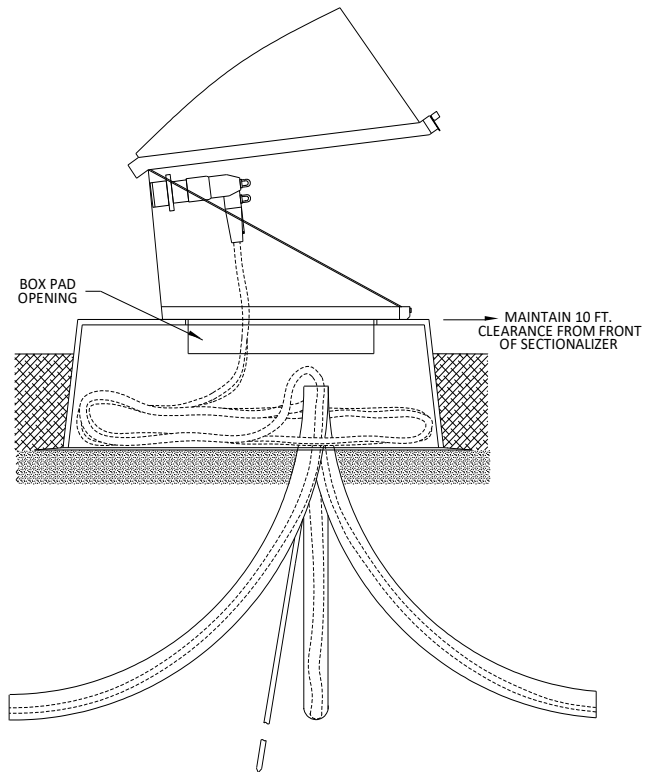

FRONT VIEW

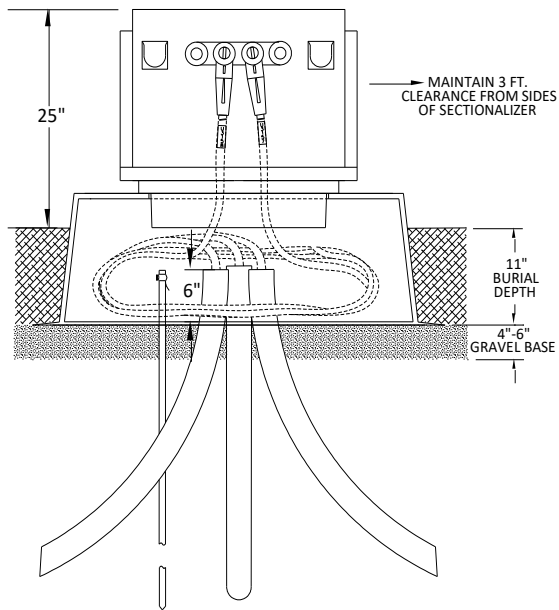


DATE APPROVED:
SEPTEMBER 8, 2016

UNDERGROUND DISTRIBUTION

C-2


3PH TRANSFORMER PAD 45 - 750 KVA (UM3-A)

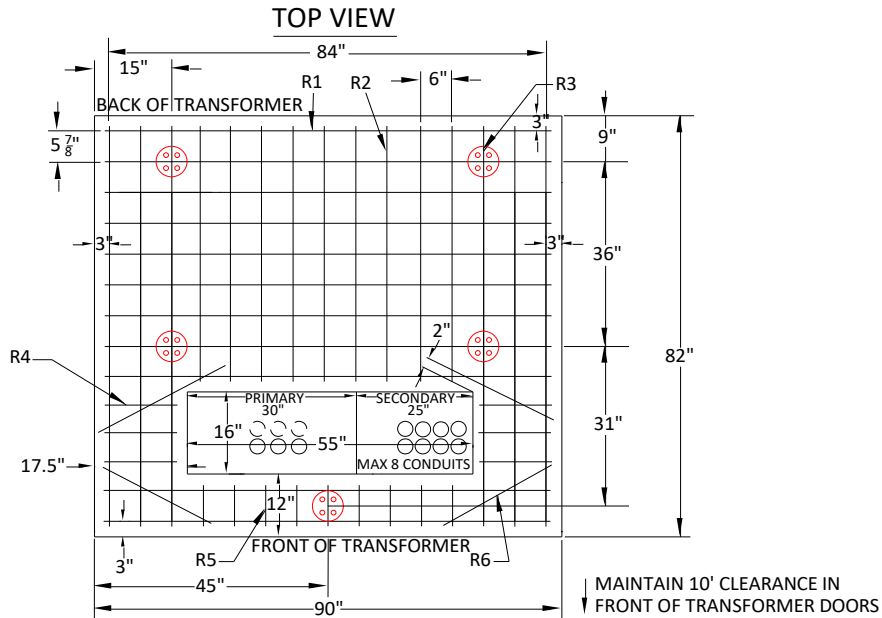

MAINTAIN CLEARANCE FROM TRANSFORMER SIDES:
 OTHER TRANSFORMERS - 5 FT.
 NON-COMBUSTIBLE WALLS - 5 FT.
 COMBUSTIBLE WALLS:
 0 TO 75 KVA - 10 FT.
 >75 KVA - 20 FT.

REINFORCING BARS; 1/2"					
R1	R2	R3	R4	R5	R6
11 X	9 X	6 X	6 X	9 X	4 X
86"	50"	78"	14"	8"	25"

SEE NOTE #3

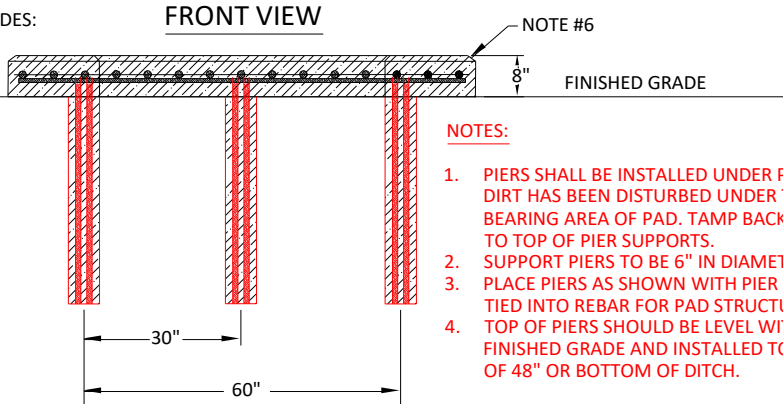

- NOTES:**
1. PIERS SHALL BE INSTALLED UNDER PAD WHEN DIRT HAS BEEN DISTURBED UNDER THE LOAD BEARING AREA OF PAD. TAMP BACKFILL (95%) TO TOP OF PIER SUPPORTS.
 2. SUPPORT PIERS TO BE 6" IN DIAMETER.
 3. PLACE PIERS AS SHOWN WITH PIER REBAR TIED INTO REBAR FOR PAD STRUCTURE.
 4. TOP OF PIERS SHOULD BE LEVEL WITH FINISHED GRADE AND INSTALLED TO A DEPTH OF 48" OR BOTTOM OF DITCH.

ANY CONDUITS STUBBED OUT FOR FUTURE USE SHALL EXTEND A MINIMUM OF 5' FROM EQUIPMENT. ENDS SHALL BE MARKED WITH 3" DIAMETER GREY PVC CONDUIT, EXTENDING 4' ABOVE GRADE AND PAINTED RED.

NOTES:

1. TAMP GROUND UNDER PAD BEFORE SETTING TO PREVENT UNEVEN SETTLING.
2. CONCRETE: 3000 POUNDS MIN. PER SQUARE INCH; 4% TO 6% ENTRAINED AIR, 3/4" MAX. SIZE AGGREGATE.
3. REINFORCING STEEL: ATSM-A615 GRADE 60; EVENLY SPACE APPROXIMATELY 6" O.C. EACH WAY AND SECURELY TIED TOGETHER.
4. MINIMUM 2 INCH CONCRETE COVER OVER REINFORCING STEEL.
5. WOOD FLOAT LEVEL FINISH LEAVING NO DEPRESSIONS.
6. 3/4" CHAMFER ALL EDGES.
7. PRIMARY AND SECONDARY CONDUIT SHALL BE INSTALLED AND SEALED BEFORE POURING PAD.
8. IF FUTURE EXPANSION TO A TRANSFORMER LARGER THAN 750 KVA IS POSSIBLE, BLUEBONNET MAY REQUEST THE CONSTRUCTION OF THE PAD ON PAGE B-6.
9. **MAXIMUM OF 8 CONDUITS, 4" SCHEDULE 40 PVC PIPES ARE ALLOWED IN THE SECONDARY COMPARTMENT.**
10. STUB THE SECONDARY PIPES AS CLOSE TO THE EDGE SECONDARY CUTOUT AS POSSIBLE. (SEE DRAWING)
11. MAXIMUM OF 6 CONDUITS, 3" SCHEDULE 40 PVC PIPES ARE ALLOWED IN THE PRIMARY COMPARTMENT.




Drawn:	Approved:	Date:
SF	Coordinators	Nov. 12, 2019


UNDERGROUND DISTRIBUTION

B-5

3PH TRANSFORMER PAD 1000 - 2500 KVA (UM3-B)

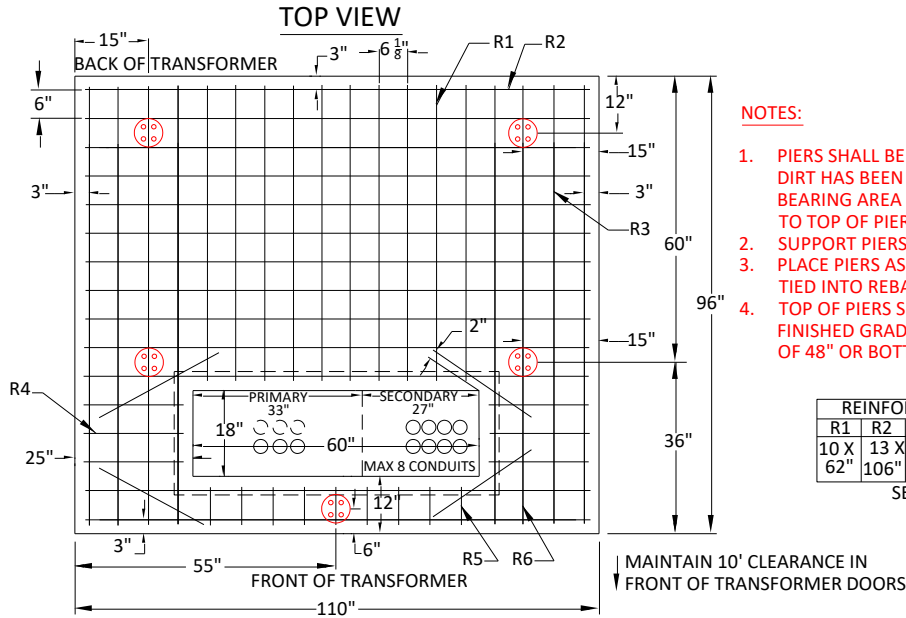

- NOTES:**
1. PIERS SHALL BE INSTALLED UNDER PAD WHEN DIRT HAS BEEN DISTURBED UNDER THE LOAD BEARING AREA OF PAD. TAMP BACKFILL (95%) TO TOP OF PIER SUPPORTS.
 2. SUPPORT PIERS TO BE 6" IN DIAMETER.
 3. PLACE PIERS AS SHOWN WITH PIER REBAR TIED INTO REBAR FOR PAD STRUCTURE.
 4. TOP OF PIERS SHOULD BE LEVEL WITH FINISHED GRADE AND INSTALLED TO A DEPTH OF 48" OR BOTTOM OF DITCH.

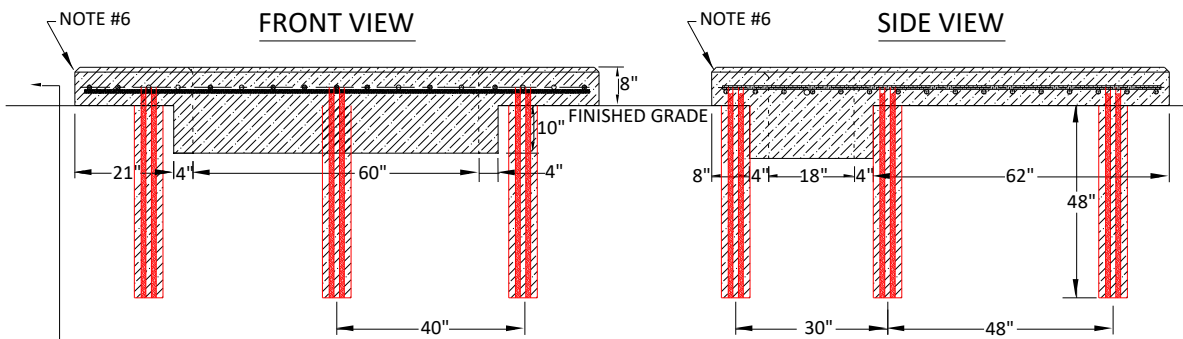

NOTE #6


↓ MAINTAIN CLEARANCE FROM TRANSFORMER SIDES:
 OTHER TRANSFORMERS - 5 FT.
 NON-COMBUSTIBLE WALLS - 5 FT.
 COMBUSTIBLE WALLS:
 0 TO 75 KVA - 10 FT.
 >75 KVA - 20 FT.

- NOTES:**
1. TAMP GROUND UNDER PAD BEFORE SETTING TO PREVENT UNEVEN SETTLING.
 2. CONCRETE: 3000 POUNDS MIN. PER SQUARE INCH; 4% TO 6% ENTRAINED AIR, 3/4" MAX. SIZE AGGREGATE.
 3. REINFORCING STEEL: ATSM-A615 GRADE 60; EVENLY SPACE APPROXIMATELY 6" O.C. EACH WAY AND SECURELY TIED TOGETHER.
 4. MINIMUM 2 INCH CONCRETE COVER OVER REINFORCING STEEL.
 5. WOOD FLOAT LEVEL FINISH LEAVING NO DEPRESSIONS.
 6. 3/4" CHAMFER ALL EDGES.
 7. PRIMARY AND SECONDARY CONDUIT SHALL BE INSTALLED AND SEALED BEFORE POURING PAD.
 8. MAXIMUM OF 8 CONDUITS, 4" SCHEDULE 40 PVC PIPES ARE ALLOWED IN THE SECONDARY COMPARTMENT.
 9. STUB THE SECONDARY PIPES AS CLOSE TO THE EDGE SECONDARY CUTOUT AS POSSIBLE. (SEE DRAWING)
 10. MAXIMUM OF 6 CONDUITS, 3" SCHEDULE 40 PVC PIPES ARE ALLOWED IN THE PRIMARY COMPARTMENT.


	Drawn:	Approved:	Date:	UNDERGROUND DISTRIBUTION	B-6
	SF	Coordinators	Nov. 12, 2019		

3PH 600A SECTIONALIZER - DIMENSIONS


TOP VIEW

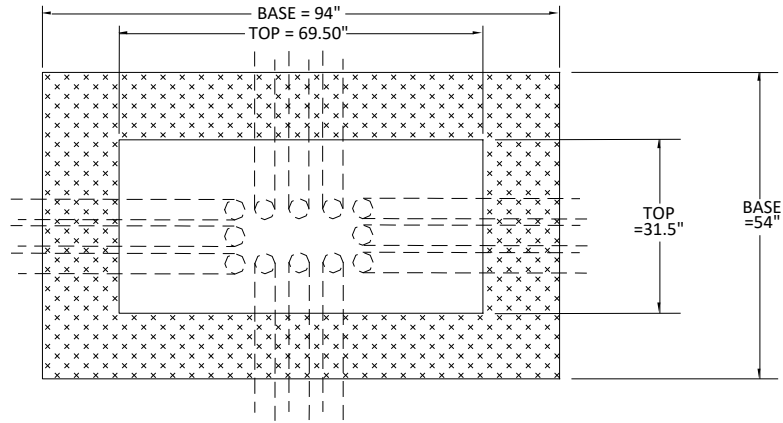

FRONT VIEW

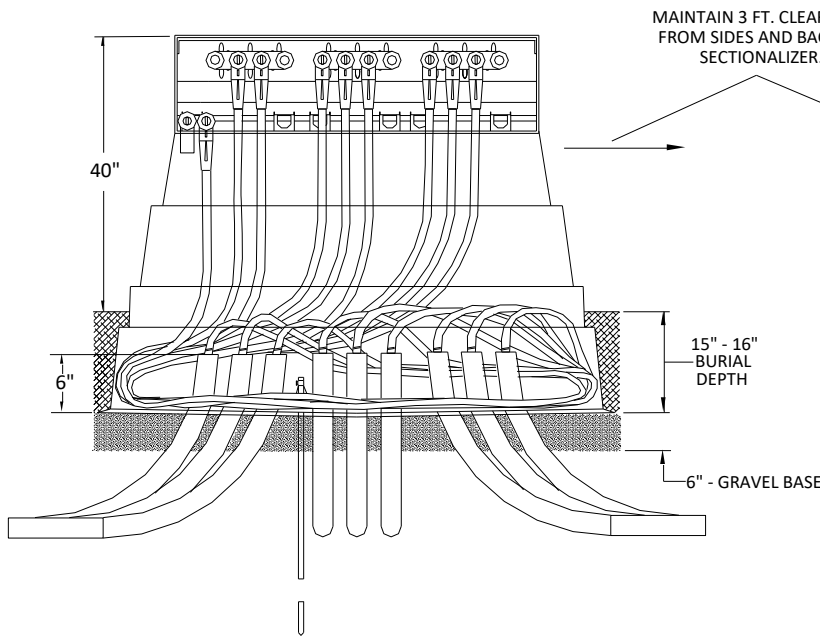

SIDE VIEW

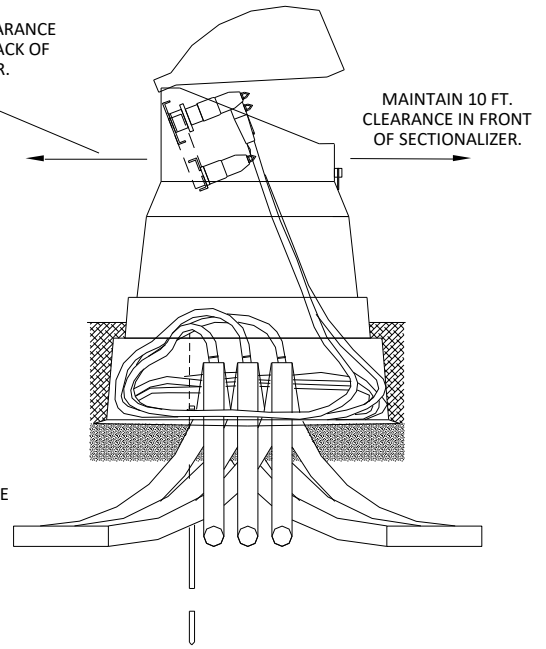


ANY CONDUITS STUBBED OUT FOR FUTURE USE SHALL EXTEND A MINIMUM OF 5' FROM EQUIPMENT. ENDS SHALL BE MARKED WITH 3" DIAMETER GREY PVC CONDUIT, EXTENDING 4' ABOVE GRADE AND PAINTED RED.



DATE APPROVED:
SEPTEMBER 8, 2016

UNDERGROUND DISTRIBUTION D-2B


STANDARD RESIDENTIAL STREETLIGHT MAST, ARM, AND HEAD

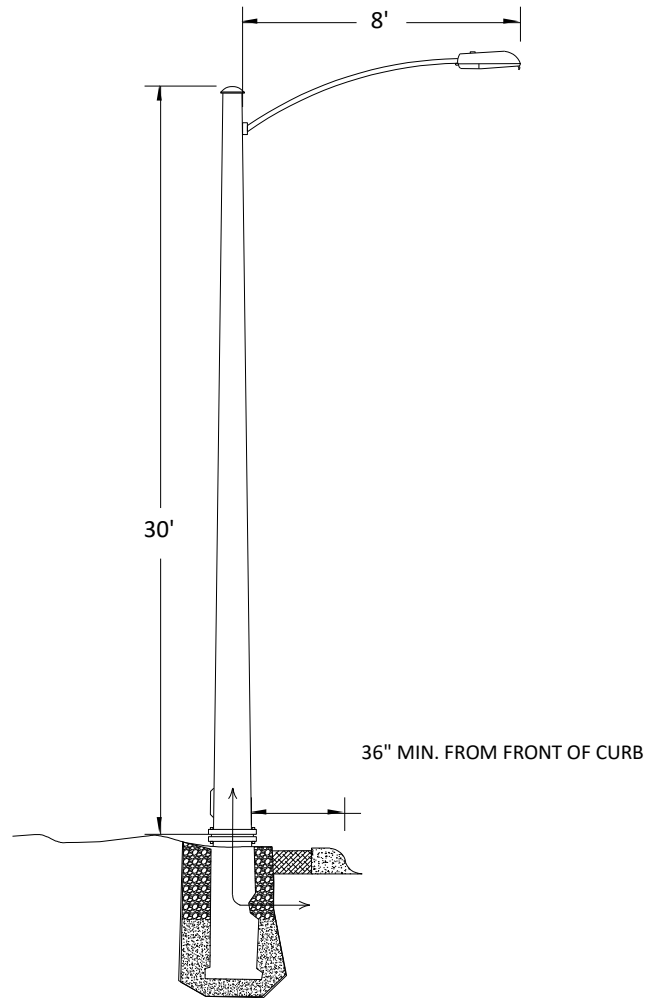


NOTES:

1. COBRAHEAD FIXTURE, LED PHOTOCELL CONTROLLED.
2. IN THE ABSENCE OF A RAISED CURB, BLUEBONNET WILL DETERMINE THE LOCATION OF STREETLIGHT POLES BASED ON APPLICABLE ZONE CRITERIA
3. STREETLIGHT BASE PROVIDED AND INSTALLED BY BEC PERSONNEL. IF DEVELOPER CHOOSES TO PROVIDE/INSTALL, BASE MUST MATCH CATALOG NUMBER FOUND ON UM1-SP
4. BASE CALLED SEPARATELY (UM1-SP)

STOCK:	QTY:	MATERIAL:	
10202	40	CABLE, #14/2 W/GROUND	SL53-8S
14842	1	POLE, ALUMINUM 30 FT. STREET LIGHT W/ 8 FT. ARM	
15580	1	LUMINAIRE, 53 WATT LED W/ PHOTOCELL (USED ON SL53-8S ONLY)	SL94-8S
15970	1	LED, STREETLIGHT MULTI VOLT 200/250W EQUIVALENT (USED ON SL94-8S ONLY)	SL140-8S
15971	1	LED, STREETLIGHT MULTI VOLT 4/400W EQUIVALENT (USED ON SL140-8S ONLY)	
10311	1	CONN, GROUND TRANS #8- 2/0	

 Bluebonnet	Drawn:	Approved:	Date:	UNDERGROUND DISTRIBUTION
	JCB	TE	Nov. 10, 2020	


STANDARD RESIDENTIAL STREETLIGHT BASE UM1-SP

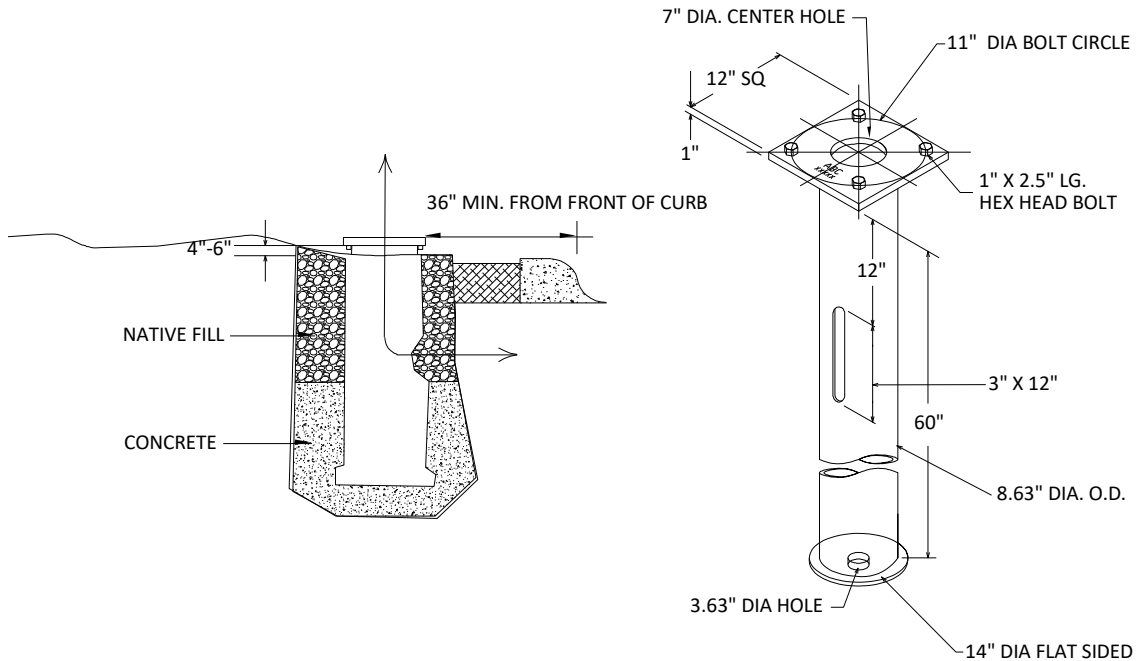


NOTES:

1. COMMERCIAL, 80LBS, SACK CONCRETE
2. SLIT SACK ON SIDE AWAY FROM POLE, SACK TO BE LAID ON LONG SIDE IN POLE HOLE
3. BASE SHOULD BE INSTALLED 4 TO 6 INCHES ABOVE GRADE.
4. HUBBELL POWER SYSTEMS CATALOG NUMBER T112-0212 (CAN BE PURCHASED FROM TECHLINE)
5. IF ORDERED CONCRETE, MIX TO BE 3000 PSI, MINIMUM
6. FLAT SIDE OF BASE TO BE PARALLEL TO BACK OF CURB
7. CONCRETE TO BE POURED UP TO BOTTOM OF KEYHOLE IN BASE. REMAINDER OF HOLE TO BE BACKFILLED WITH NATIVE FILL

STOCK:	QTY:	MATERIAL:
10566	1	FOUNDATION, STEEL STREET LIGHT POLE (CALL SEPARATELY)
10248	6	CEMENT READY MIX 80LBS SACK


 Bluebonnet	Drawn:	Approved:	Date:	UNDERGROUND DISTRIBUTION
	SEF	TE	Nov. 10, 2020	

CLEARING RIGHT-OF-WAY GUIDE

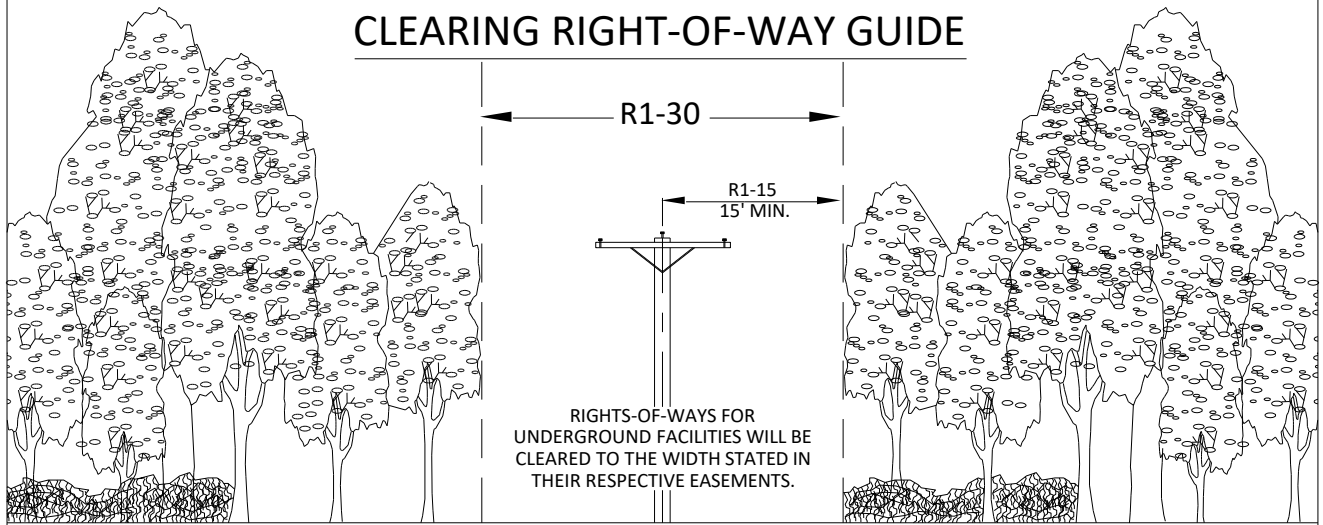


RIGHTS-OF-WAYS FOR UNDERGROUND FACILITIES WILL BE CLEARED TO THE WIDTH STATED IN THEIR RESPECTIVE EASEMENTS.

ELEVATION

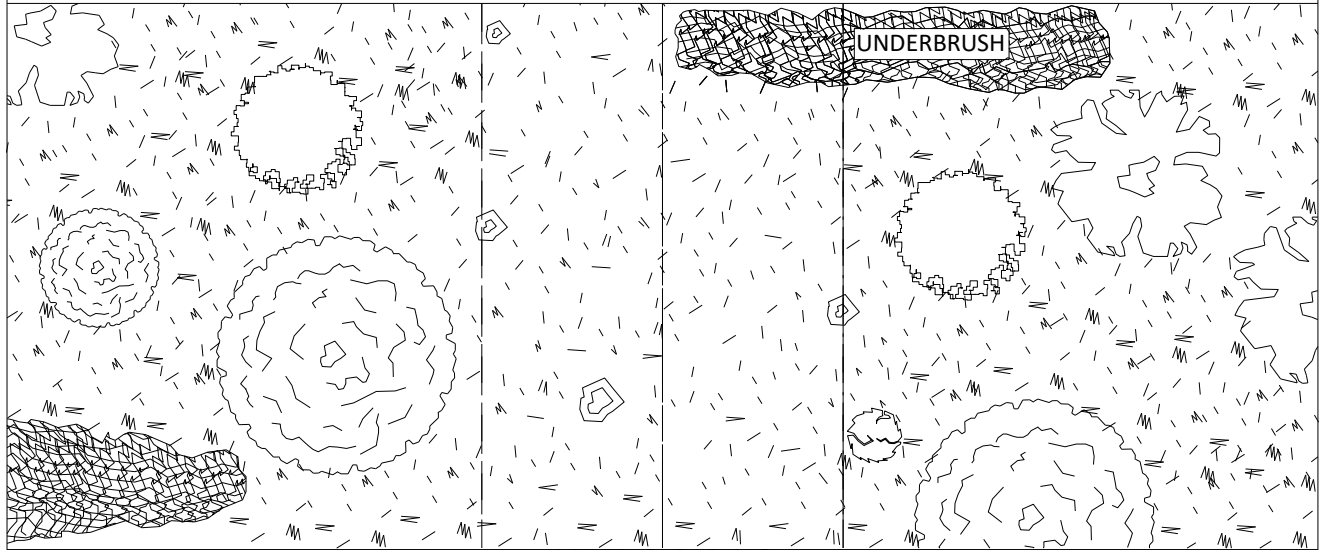

AFTER CLEARING

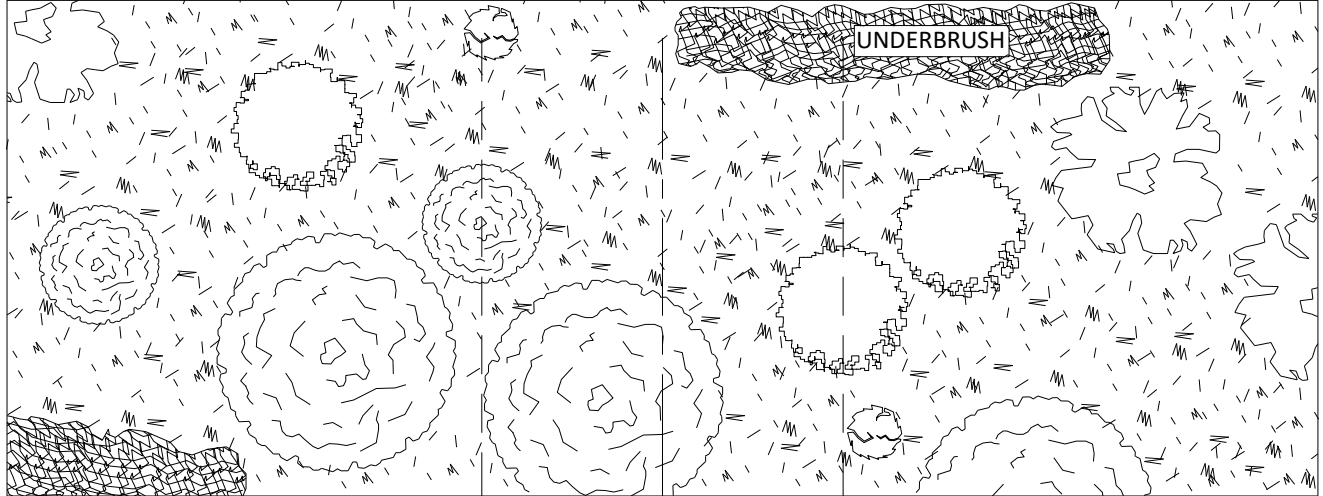


BEFORE CLEARING




UNDERGROUND DISTRIBUTION

USGE-9 SWITCHGEAR CONSTRUCTION STANDARD


SOURCE

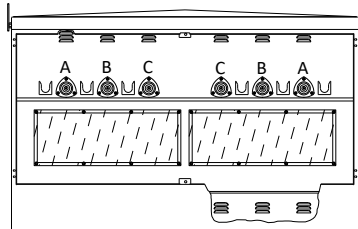


TAP

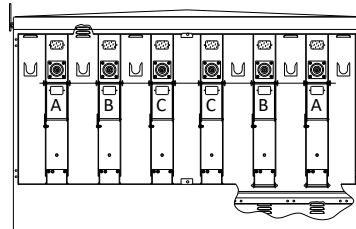

FRONT VIEW

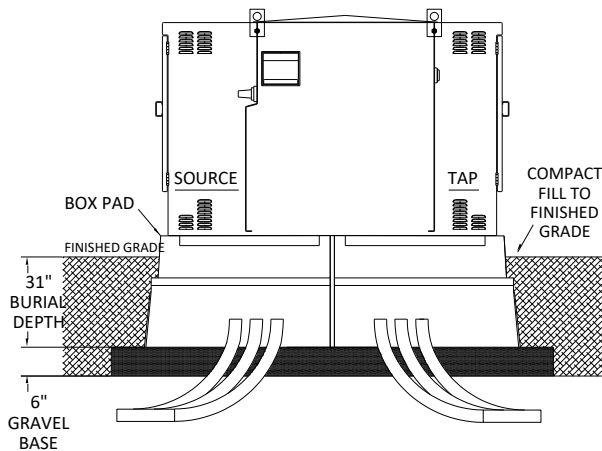

TOP VIEW

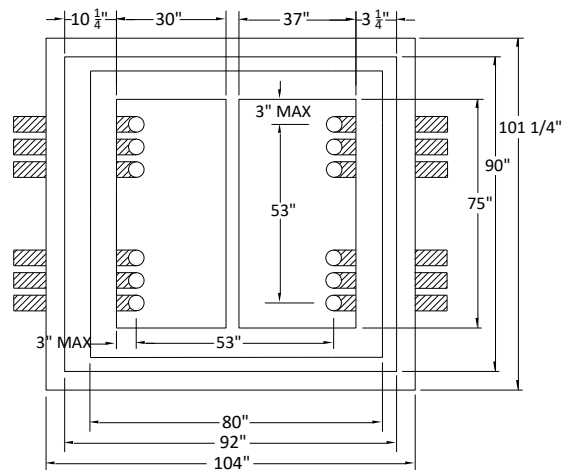

BEC STK#:	QTY:	MATERIAL USGE-9:
13119	1	SWITCHGEAR, AIR, 2-200 FUSE, 2-600 SWITCHES
10988	2	ROD, GROUND 5/8" X 8', 13 MIL CU CLAD
10262	2	CLAMP, GRD ROD GALV 3/4 L
10333	13	CONN, SPLIT BOLT CC #2 L
11196	6.148	WIRE, COPPER BARE S.D. #2 7 STR L
10732	4	INSECTICIDE ANT CONTROL L
10779	6	LOCK, PADLOCK, STANDARD WITH BEC LOGO
10386	6	CONN,INSUL.L.B.PARKING STAND L
10237	6	CAPS, ASSY GRD TERMINATION L
11202	26.12	WIRE, COPPER BARE 4/0 19 STR L
10172	6	BUSHING, LB INSERT 25KV L
14300	6	FITTING, FUSE END, SM-20, 15/25 KV L




DATE APPROVED:
MARCH 8, 2017


UNDERGROUND DISTRIBUTION

USGE-10 SWITCHGEAR CONSTRUCTION STANDARD


SOURCE

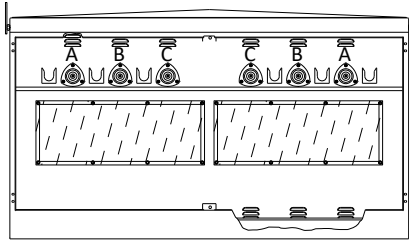


TAP

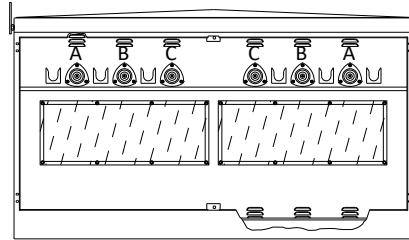

FRONT

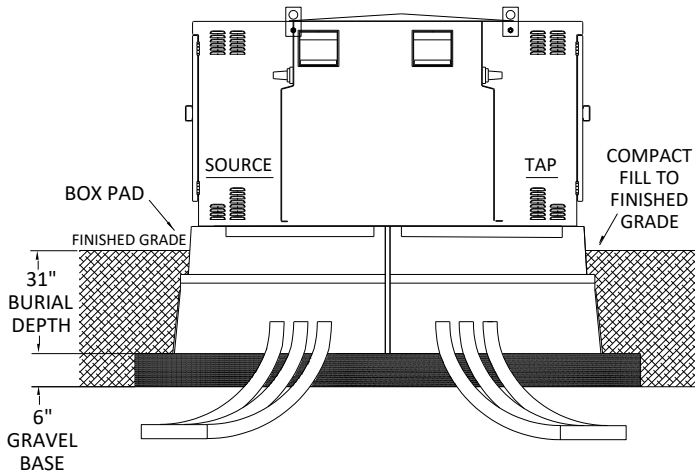

TOP VIEW

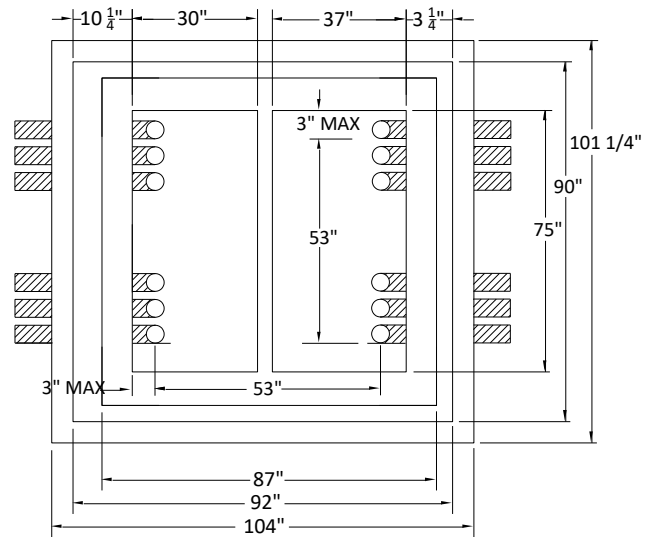

BEC STK#:	QTY:	MATERIAL USGE-10:
13130	1	SWITCHGEAR, AIR, PADMOUNTED, 4-600 SWITCHES
10988	2	ROD, GROUND 5/8" X 8', 13 MIL CU CLAD
10262	2	CLAMP, GRD ROD GALV 3/4 L
10333	13	CONN, SPLIT BOLT CC #2 L
11196	6.148	WIRE, COPPER BARE S.D. #2 7 STR L
10732	4	INSECTICIDE ANT CONTROL L
10779	10	LOCK, PADLOCK, STANDARD WITH BEC LOGO
11202	26.12	WIRE, COPPER BARE #19 STR L




DATE APPROVED:
MARCH 8, 2017


UNDERGROUND DISTRIBUTION

PME-11 SWITCHGEAR CONSTRUCTION STANDARD


SOURCE

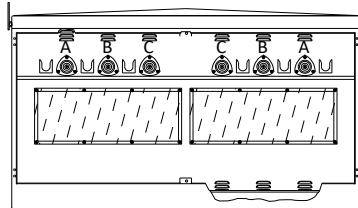


TAP

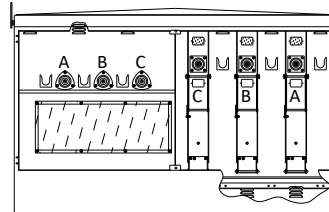

FRONT

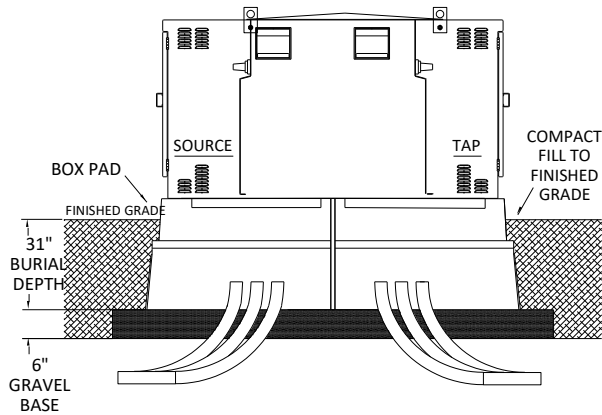

TOP VIEW

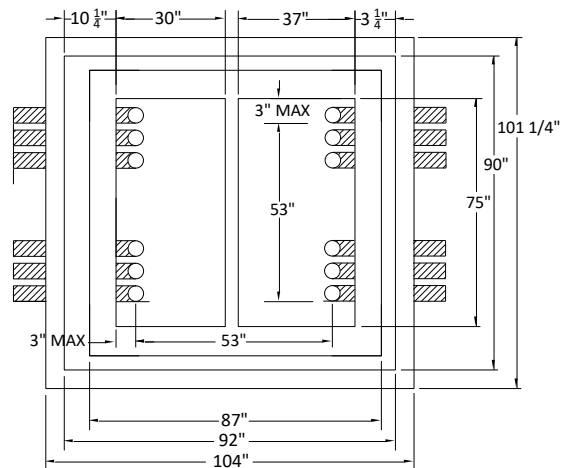

BEC STK#:	QTY:	MATERIAL USGE-9:
12971	1	SWITCHGEAR, AIR, 1-200 FUSE, 3-600 SWITCHES
10988	2	ROD, GROUND 5/8" X 8', 13 MIL CU CLAD
10262	2	CLAMP, GRD ROD GALV 3/4 L
10333	13	CONN, SPLIT BOLT CC #2 L
11196	6.148	WIRE, COPPER BARE S.D. #2 7 STR L
10732	4	INSECTICIDE ANT CONTROL L
10779	8	LOCK, PADLOCK, STANDARD WITH BEC LOGO
10386	3	CONN,INSUL.L.B.PARKING STAND L
10237	3	CAPS, ASSY GRD TERMINATION L
11202	26.12	WIRE, COPPER BARE 4/0 19 STR L
10172	3	BUSHING, LB INSERT 25KV L
14300	3	FITTING, FUSE END, SM-20, 15/25 KV L



DATE APPROVED:
MARCH 8, 2017

UNDERGROUND DISTRIBUTION

Notes:

1. Neutral (must be insulated) may be reduced no more than two sizes on residential application. No reduction of the neutral is allowed on commercial applications.
2. Weatherproof fittings required.
3. This meter loop specification is good for the following voltages: 120/240, 120/208, 240/480 & 277/480. Please use MS-301 for straight 480 Delta applications only.
4. Meter pole must remain free of structures and private attachments other than meter loop.
5. Bluebonnet Electric will supply ground rod.
6. On steel poles use a 3/8" X 1 1/2" self tapping screw.
7. For your safety, only Bluebonnet personnel are authorized to install meter loops or other BEC equipment on a Bluebonnet pole. Members shall have loop assembled and available for installation by Bluebonnet.

FOR SINGLE PHASE TRAFFIC CONTROL DEVICES:

200amp, 4 terminal, 1-phase, will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R rating. Lever by-pass is only required for meter installations serving traffic control devices, including railroad, that need to remain functional at all times.

FOR THREE PHASE APPLICATIONS DESCRIPTION:


200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, an NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline (512-332-2978)

Galvanized metal conduit with (1) locknut and fiber bushing inside meter can on nipple and (1) locknut under meter can. Maintain 3-6" distance between the meter can and the disconnect. Member shall use a metal nipple. A Straight or offset nipple is acceptable.

#6 solid, bare ground wire and clamp attached to Bluebonnet's pole ground. Ground rod provided by Bluebonnet.

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

FOR THE MEMBER'S SAFETY, WIRING INSTALLATIONS SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

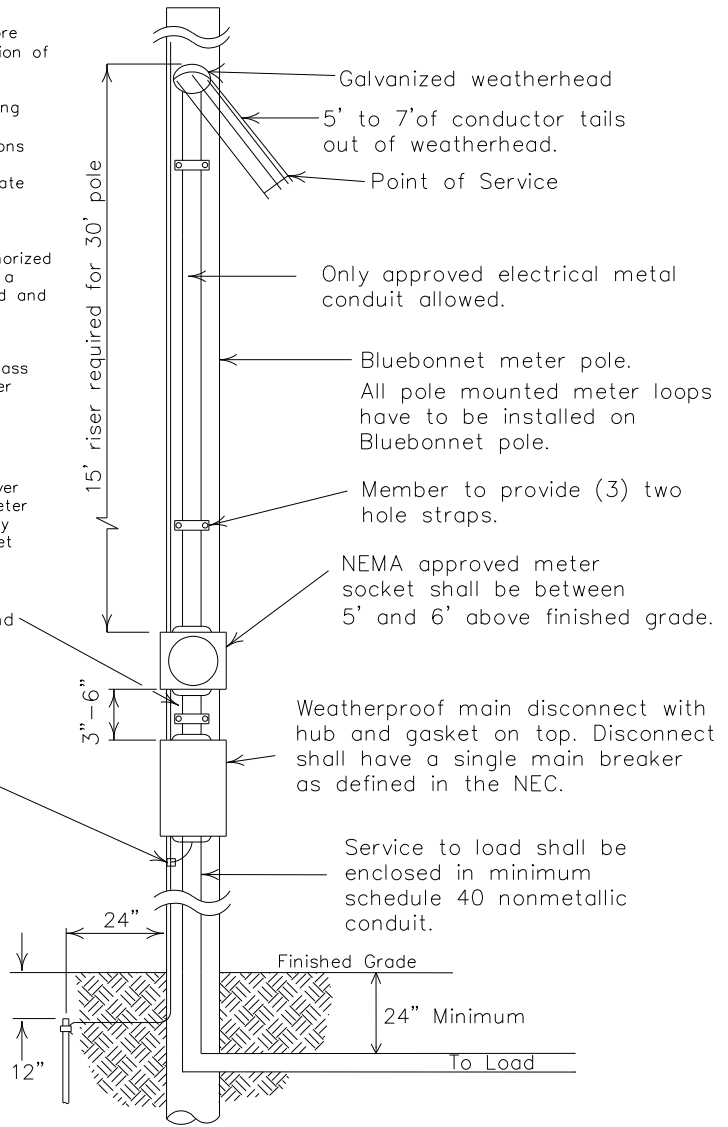

Latest update can be found at <http://www.bluebonnetelectric.coop>

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENTS OF STANDARD WIRE SIZES
(RHH, RHW, THW, THWN, THHN, AND XHHW)
REFER TO NEC FOR OTHER CALCULATIONS.

COPPER CONDUCTOR			ALUMINUM CONDUCTOR		
Wire Size	Breaker Size	Conduit/Nipple Size	Wire Size	Breaker Size	Conduit/Nipple Size
#6	60 Amp	1 1/4" Conduit	#4	60 Amp	1 1/4" Conduit
#4	100 Amp	1 1/4" Conduit	#2	100 Amp	1 1/4" Conduit
#2	125 Amp	1 1/2" Conduit	#1/0	125 Amp	1 1/2" Conduit
#1	150 Amp	2" Conduit	#2/0	150 Amp	2" Conduit
#2/0	200 Amp	2" Conduit	#4/0	200 Amp	2" Conduit

15' METER LOOP
1Ø OR 3Ø 60-200 AMP
METER LOOP ON METER POLE
(GOOD FOR VOLTAGES: 120/240, 120/208, 240/480, 277/480)



DATE	REVISIONS	Drawn By :	Checked By :	Approved By :
11-27-17	ADDED NIPPLE AFTER CONDUIT SIZE	RG	MS COMMITTEE	MS COMMITTEE
03-31-20	ADDED NOTE 7	Scale :	Date:	
11-04-21	ADDED MAIN BREAKER NOTE	NONE	11-04-2021	MS-10115

Notes:

1. Neutral (must be insulated) may be reduced no more than two sizes on residential application. No reduction of the neutral is allowed on commercial applications.
2. Weatherproof fittings required.
3. This meter loop specification is good for the following voltages: 120/240, 120/208, 240/480 & 277/480. Please use MS-301 for straight 480 Delta applications only.
4. Meter pole must remain free of structures and private attachments other than meter loop.
5. Bluebonnet Electric will supply ground rod.
6. On steel poles use a 3/8" X 1 1/2" self tapping screw.
7. For your safety, only Bluebonnet personnel are authorized to install meter loops or other BEC equipment on a Bluebonnet pole. Members shall have loop assembled and available for installation by Bluebonnet.

FOR SINGLE PHASE TRAFFIC CONTROL DEVICES:

200amp, 4 terminal, 1-phase, will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R rating. Lever by-pass is only required for meter installations serving traffic control devices, including railroad, that need to remain functional at all times.

FOR THREE PHASE APPLICATIONS DESCRIPTION:

200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications.
Techline (512-332-2978)

Galvanized metal conduit with (1) locknut and fiber bushing inside meter can on nipple and (1) locknut under meter can. Maintain 3-6" distance between the meter can and the disconnect. Member shall use a metal nipple. A Straight or offset nipple is acceptable.

#6 solid, bare ground wire and clamp attached to Bluebonnet's pole ground.
Ground rod provided by Bluebonnet.

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

FOR THE MEMBER'S SAFETY, WIRING INSTALLATIONS SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Latest update can be found at <http://www.bluebonnetelectric.coop>

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENTS OF STANDARD WIRE SIZES


(RHH, RHW, THW, THWN, THHN, AND XHHW)
REFER TO NEC FOR OTHER CALCULATIONS.

COPPER CONDUCTOR			ALUMINUM CONDUCTOR		
Wire Size	Breaker Size	Conduit/Nipple Size	Wire Size	Breaker Size	Conduit/Nipple Size
#6	60 Amp	1 1/4" Conduit	#4	60 Amp	1 1/4" Conduit
#4	100 Amp	1 1/4" Conduit	#2	100 Amp	1 1/4" Conduit
#2	125 Amp	1 1/2" Conduit	#1/0	125 Amp	1 1/2" Conduit
#1	150 Amp	2" Conduit	#2/0	150 Amp	2" Conduit
#2/0	200 Amp	2" Conduit	#4/0	200 Amp	2" Conduit

19' METER LOOP
1Ø OR 3Ø 60-200 AMP
METER LOOP ON METER POLE
(GOOD FOR VOLTAGES: 120/240, 120/208, 240/480, 277/480)



DATE	REVISIONS	Drawn By :	Checked By :	Approved By :
11-27-17	ADDED NIPPLE AFTER CONDUIT SIZE	RG	MS COMMITTEE	MS COMMITTEE
03-31-20	ADDED NOTE 7	Scale :	Date:	MS-10119
11-04-21	ADDED MAIN BREAKER NOTE	NONE	11-04-2021	

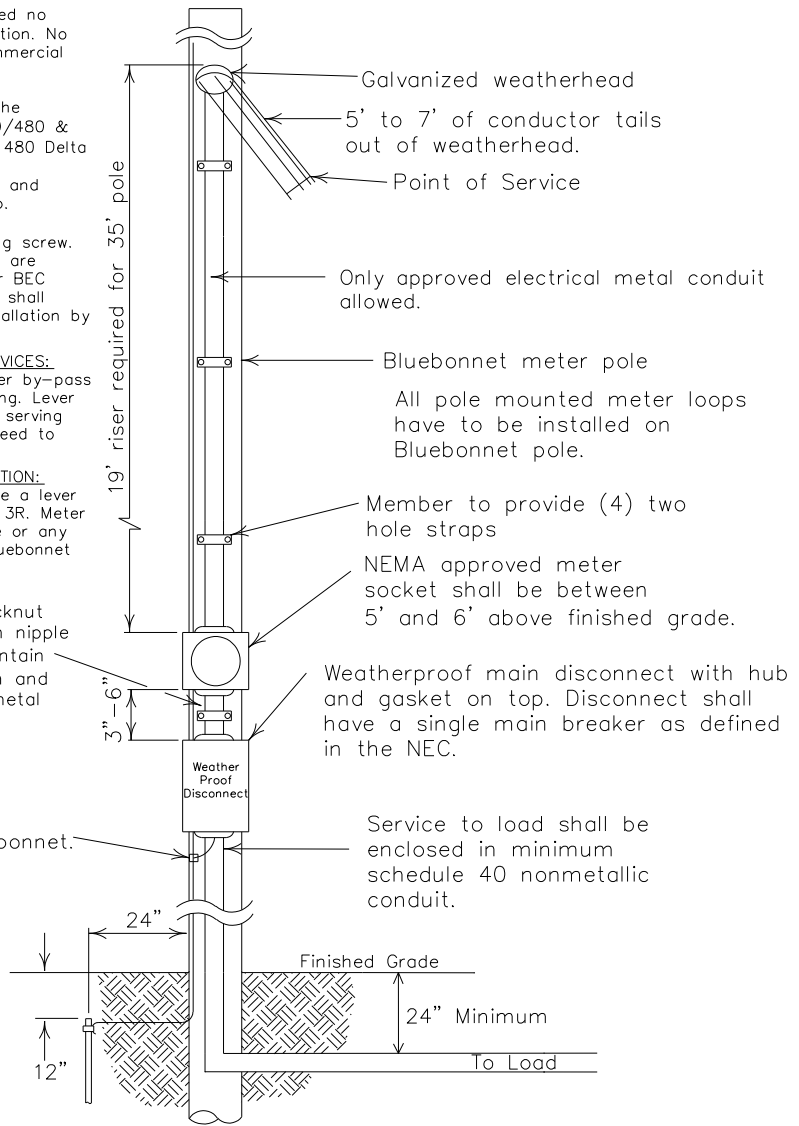

FOR THREE PHASE APPLICATIONS

DESCRIPTION:

200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline (Red Rock 512-332-2978) or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications.


FOR SINGLE PHASE TRAFFIC CONTROL DEVICES:

200amp, 4 terminal, 1-phase, will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R rating. Lever by-pass is only required for meter installations serving traffic control devices, including railroad, that need to remain functional at all times.

FOR THE MEMBER'S SAFETY, WIRING INSTALLATIONS SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Notes:

1. Neutral must be insulated and may be reduced no more than two sizes on residential application. No reduction of the neutral is allowed on commercial application.
2. Weatherproof fittings required.
3. Bluebonnet's pole must remain free of structures and private attachments other than meter loop.
4. All secondary connections made by BEC.
5. This meter loop specification is good for the following voltages: 120/240, 120/208, 277/480, 240/480 (Single phase only). Please use MS-301 for straight 480 Delta applications.
6. Bluebonnet Electric will supply ground rod.
7. On steel poles use a 3/8" x 1 1/2" self tapping screw.
8. For your safety, only Bluebonnet personnel are authorized to install meter loops or other BEC equipment on a Bluebonnet pole. Members shall have loop assembled and available for installation by Bluebonnet.

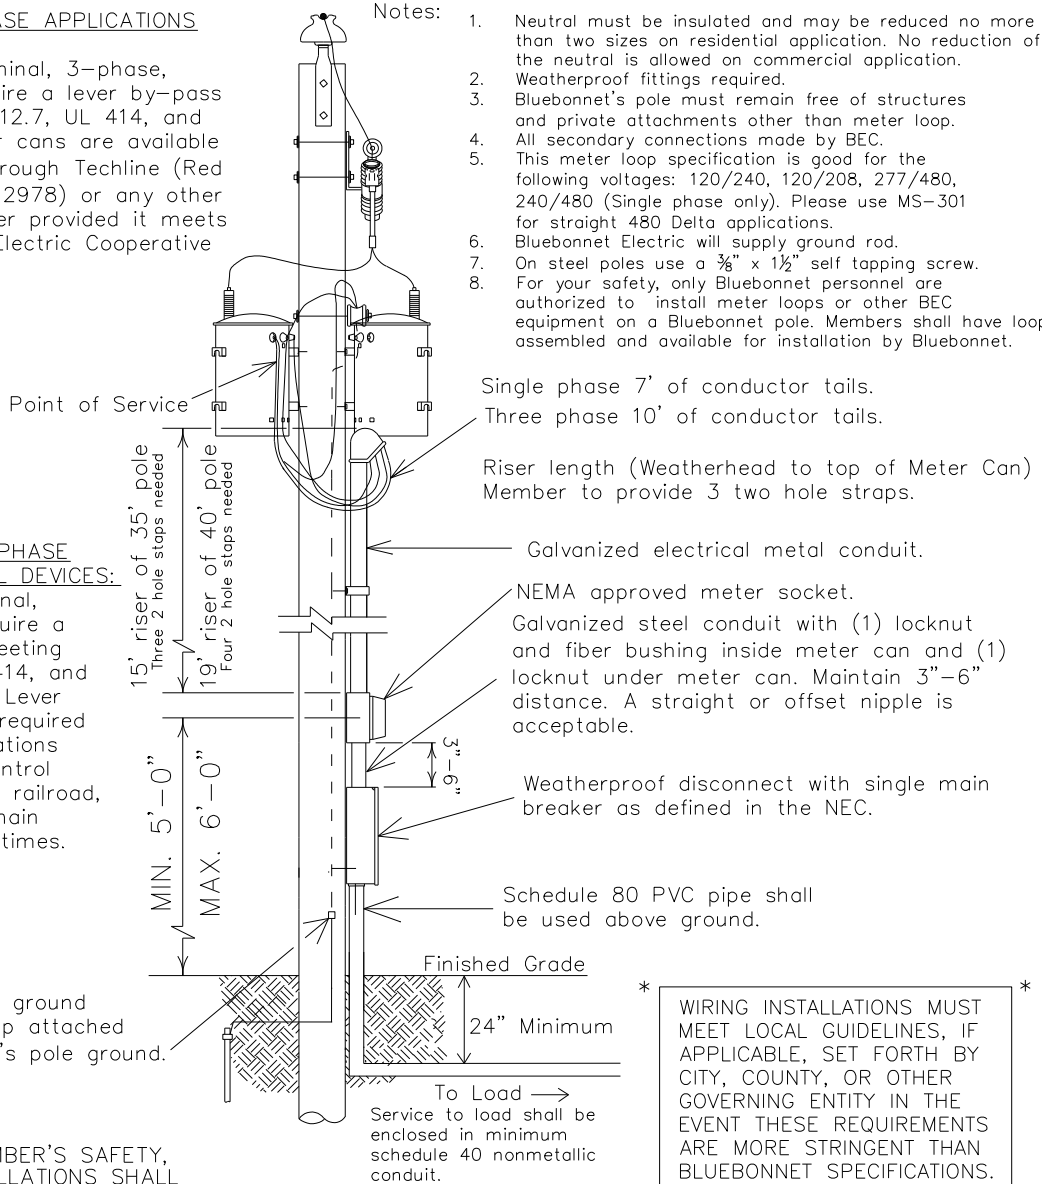

#6 solid, bare ground wire and clamp attached to Bluebonnet's pole ground.

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

Latest update can be found at <http://www.bluebonnetelectric.coop>

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENTS OF STANDARD WIRE SIZES (RHH, RHW, THW, THWN, AND XHHW) REFER TO NEC FOR OTHER CALCULATIONS.

COPPER CONDUCTOR			ALUMINUM CONDUCTOR		
Wire Size	Breaker Size	Conduit/Nipple Size	Wire Size	Breaker Size	Conduit/Nipple Size
#6	60 Amp	1 1/4" Conduit	#4	60 Amp	1 1/4" Conduit
#4	100 Amp	1 1/4" Conduit	#2	100 Amp	1 1/4" Conduit
#2	125 Amp	1 1/2" Conduit	#1/0	125 Amp	1 1/2" Conduit
#1	150 Amp	2" Conduit	#2/0	150 Amp	2" Conduit
#2/0	200 Amp	2" Conduit	#4/0	200 Amp	2" Conduit





1Ø OR 3Ø 60-200 AMP METER LOOP ON TRANSFORMER POLE



DATE	REVISIONS	Drawn By :	Checked By :	Approved By :
11-27-17	ADDED NIPPLE AFTER CONDUIT SIZE	RG	MS COMMITTEE	MS COMMITTEE
03-18-20	ADDED NOTE 8	Scale :	Date:	
11-04-21	ADDED MAIN BREAKER NOTE	NONE	11-04-2021	MS-102

Latest update can be found at
www.bluebonnetelectric.coop

- Notes:
1. Wire sized to total disconnect size. (See Chart below) insulated and may be reduced no more than two sizes on residential application. No reduction of the neutral is allowed on commercial application.
 2. Weatherproof fittings required. Meter loop can not be mounted on the side of a mobile home. Reference NEC SEC. 230.9 (A) for meter clearances that state three feet from openings. Make sure and reinforced point to connect service attachment.
 3. Weatherproof fittings unenclosed on exterior of structure.
 4. Meter loop can not be mounted on the side of a mobile home.
 5. Reference NEC SEC. 230.9 (A) for meter clearances that state three feet from openings. Make sure and reinforced point to connect service attachment.
 6. Meter loop can not be mounted on the side of a mobile home.
 7. Reference NEC SEC. 230.9 (A) for meter clearances that state three feet from openings. Make sure and reinforced point to connect service attachment.

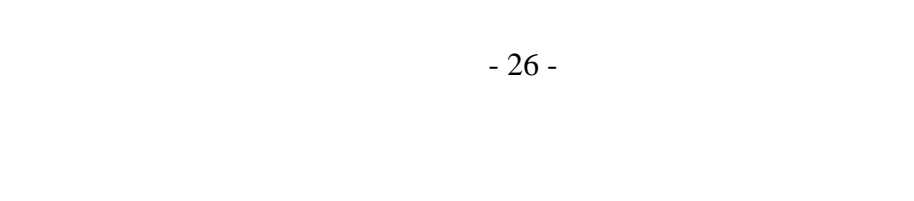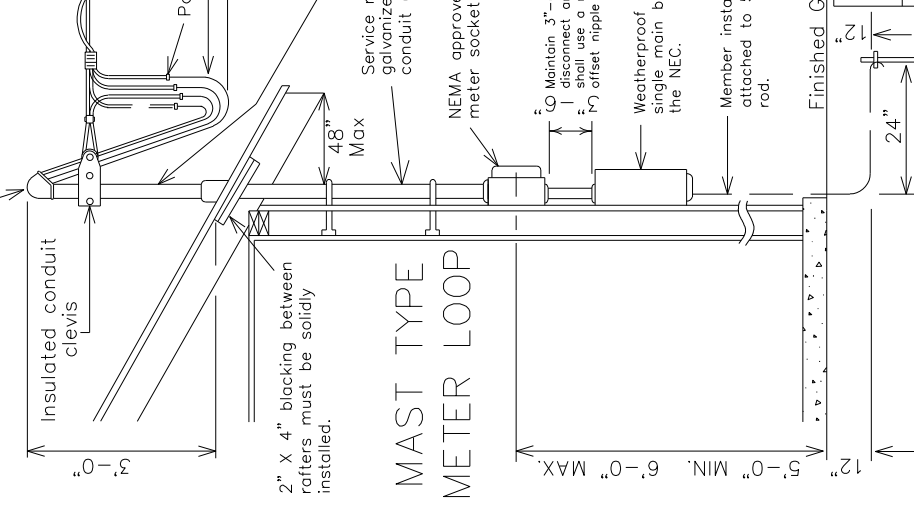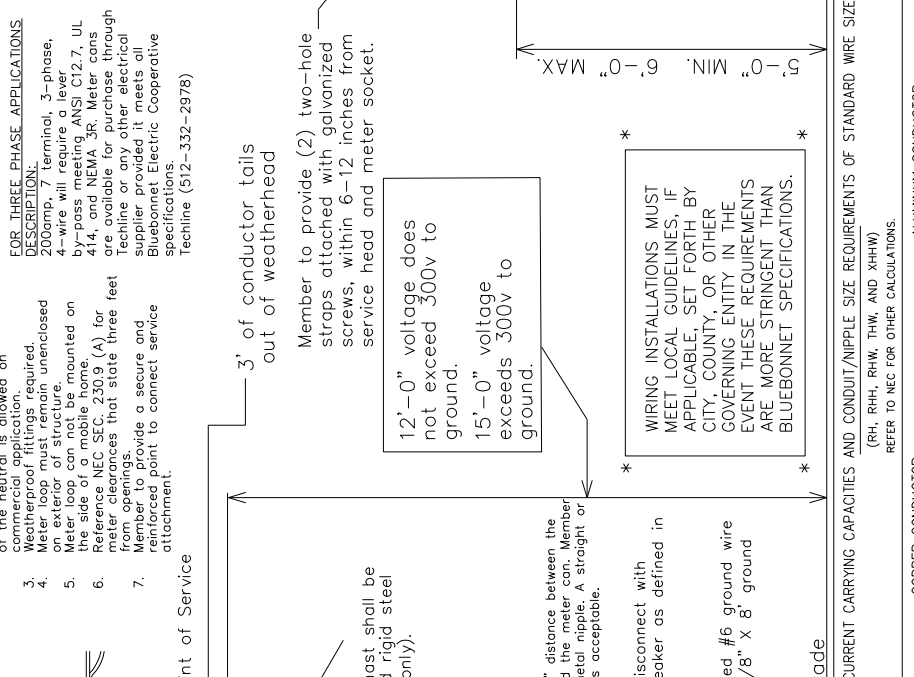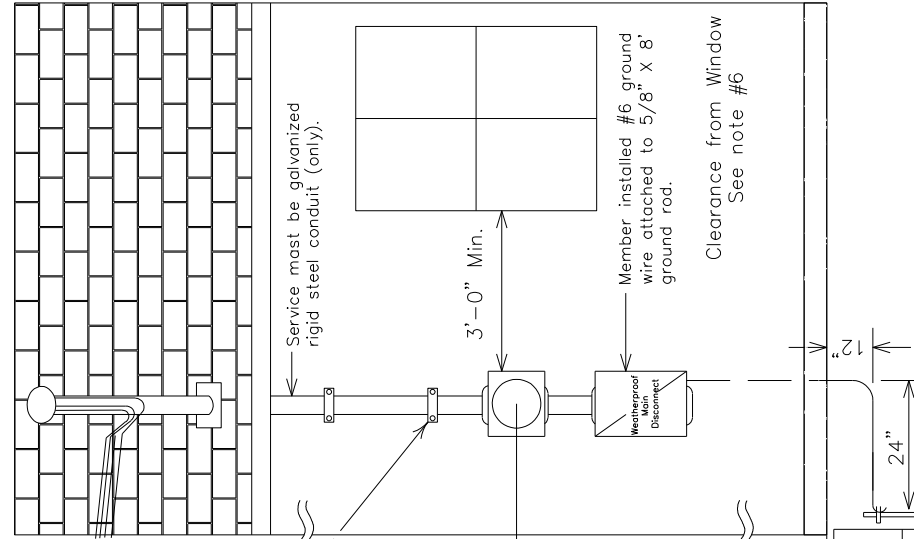

Notes:

- Line taps shall be made in the galvanized trough by the electrical contractor. No more than (2) conductors per phase shall be allowed. No more than (2) risers will be connected per installation.
- Weatherproof fittings required.
- Wire sized to total disconnect sizes.
- Neutral(s) may be reduced no more than two sizes on residential application. No reduction of the neutral is allowed on commercial application.
- Bluebonnet pole must remain free of structures and private attachments other than meter loop riser assembly.
- Meter assembly must remain unenclosed on exterior of structure.
- Meter assembly cannot be mounted on a mobile home.
- If secondary service exceeds (2) 2", 3", or 4" approved electrical metal conduit; BEC will install a primary underground transformer at member's expense.
- Maintain 3"-6" distance between the disconnect and the meter can. Member shall use a metal nipple. A straight or offset nipple is acceptable.
- #6 solid, bare ground copper wire and clamp attached to Bluebonnet's pole ground.

Ⓐ
Transformer Pole Riser Length:
35' Pole = 20' Riser
40' Pole = 24' Riser

Ⓑ
Service Pole Riser Length:
30' Pole = 20' Riser
35' Pole = 24' Riser

Ⓒ
Member's Conduit
Member's conduit shall be installed 8"-12" from pole.

FOR THREE PHASE APPLICATIONS

DESCRIPTION:

200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline (512-332-2978)

No more than four 60-200 amp metersockets and weatherproof main disconnects. No more than one disconnect per enclosure.

RISER ONLY

Only 2", 3", or 4" approved electrical metal conduct allowed above finished grade. Risers will not exceed 2 risers per pole. Member will provide 10' of conductor tails from top of weatherhead. BEC to supply Stand-Offs. (Bluebonnet to mount risers to pole)


8' ground rod to be driven 12" below grade

3000 PSI. Concrete Min.

24" Minimum

To Load
Service to load cable enclosed in minimum schedule 40 nonmetallic conduit.

Equipment rack 2" or 3" steel pipe with uni-strut horizontal support.



Galvanized Trough

Rack minimum 6'
Building minimum 15'
Maximum 100'

Center of Meter

5' MIN. - 6' MAX.

Finished Grade

2' MIN

24" Minimum

8" Min. Dia.

8' MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

8" MIN


8" MIN

8" MIN

8" MIN

8" MIN

8" MIN

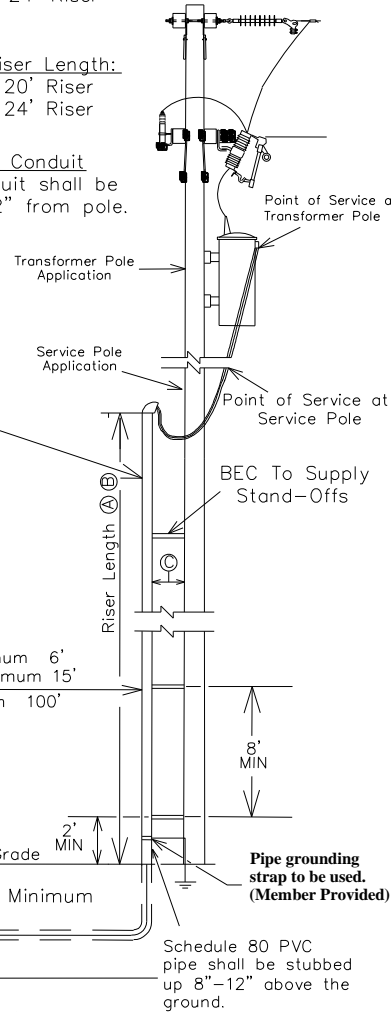

Pipe grounding strap to be used. (Member Provided)

Schedule 80 PVC pipe shall be stubbed up 8"-12" above the ground.

Minimum schedule 40 rigid nonmetallic service conduit below finished grade. No schedule 40 conduit allowed above ground level on source side of main disconnect.

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

FOR THE MEMBER'S SAFETY, WIRING INSTALLATION AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Latest update can be found at www.bluebonnetelectric.coop

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENT OF STANDARD WIRE SIZE. (RHH, RHW, THW, THWN, THHN, AND XHHW) REFER TO NEC FOR OTHER CALCULATIONS.					
WIRE SIZE	COPPER CONDUCTOR/ BREAKER SIZE	CONDUIT/NIPPLE SIZE	WIRE SIZE	ALUMINUM CONDUCTOR/ BREAKER SIZE	CONDUIT/NIPPLE SIZE
#6	60 AMP	1/4" CONDUIT	#4	60 AMP	1/4" CONDUIT
#4	100 AMP	1/4" CONDUIT	#2	100 AMP	1/4" CONDUIT
#2	125 AMP	1/2" CONDUIT	#1/0	125 AMP	1/2" CONDUIT
#1	150 AMP	2" CONDUIT	#2/0	150 AMP	2" CONDUIT
#2/0	200 AMP	2" CONDUIT	#4/0	200 AMP	2" CONDUIT

1Ø OR 3Ø 60-200 AMP MULTIPLE METERS ON RACK OR BUILDING NOT TO EXCEED A TOTAL OF 800 AMPS



DATE	REVISIONS	Drawn By :	Checked By :	Approved By :
12-07-2017	ADDED WIRE SIZING CHART.	RG	MS COMMITTEE	MS COMMITTEE
11-19-2019	ADDED SOLID COPPER NOTE.	Scale :	Date :	MS-105
11-04-2021	ADDED MAIN BREAKER NOTE.	NONE	11-04-2021	

Notes:

1. Weatherproof fittings required.
2. Wire sized to total disconnect size.
3. Neutral may only be reduced two sizes on residential application.
4. No reduction of the neutral is allowed on commercial application. Bluebonnet pole must remain free of structures and private attachments other than meter loop riser assembly.
5. Meter assembly must remain unenclosed on exterior of structure.
6. Meter cannot be mounted on a mobile home.
7. All secondary connections made by BEC.
8. #6 solid, bare ground copper wire and clamp attached to Bluebonnet's pole ground.


CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENT OF STANDARD WIRE SIZE (RHH, RHW, THW, THWN, THHN, AND XHHW) REFER TO NEC FOR OTHER CALCULATIONS.	
COPPER CONDUCTOR	
WIRE SIZE	CONDUIT/NIPPLE SIZE
#6	1/4" CONDUIT
#8	1/4" CONDUIT
#10	1/2" CONDUIT
#12	1/2" CONDUIT
#14	3/4" CONDUIT
#16	3/4" CONDUIT
#18	1" CONDUIT
#20	1" CONDUIT
#24	1 1/2" CONDUIT
#30	2" CONDUIT
#36	2" CONDUIT
#42	2 1/2" CONDUIT
#48	3" CONDUIT
#54	3" CONDUIT
#60	3 1/2" CONDUIT
#66	3 1/2" CONDUIT
#72	4" CONDUIT
#78	4" CONDUIT
#84	4 1/2" CONDUIT
#90	4 1/2" CONDUIT
#96	5" CONDUIT
#102	5" CONDUIT
#108	5 1/2" CONDUIT
#114	5 1/2" CONDUIT
#120	6" CONDUIT
#126	6" CONDUIT
#132	6 1/2" CONDUIT
#138	6 1/2" CONDUIT
#144	7" CONDUIT
#150	7" CONDUIT
#156	7 1/2" CONDUIT
#162	7 1/2" CONDUIT
#168	8" CONDUIT
#174	8" CONDUIT
#180	8 1/2" CONDUIT
#186	8 1/2" CONDUIT
#192	9" CONDUIT
#198	9" CONDUIT
#204	9 1/2" CONDUIT
#210	9 1/2" CONDUIT
#216	10" CONDUIT
#222	10" CONDUIT
#228	10 1/2" CONDUIT
#234	10 1/2" CONDUIT
#240	11" CONDUIT
#246	11" CONDUIT
#252	11 1/2" CONDUIT
#258	11 1/2" CONDUIT
#264	12" CONDUIT
#270	12" CONDUIT
#276	12 1/2" CONDUIT
#282	12 1/2" CONDUIT
#288	13" CONDUIT
#294	13" CONDUIT
#300	13 1/2" CONDUIT
#306	13 1/2" CONDUIT
#312	14" CONDUIT
#318	14" CONDUIT
#324	14 1/2" CONDUIT
#330	14 1/2" CONDUIT
#336	15" CONDUIT
#342	15" CONDUIT
#348	15 1/2" CONDUIT
#354	15 1/2" CONDUIT
#360	16" CONDUIT
#366	16" CONDUIT
#372	16 1/2" CONDUIT
#378	16 1/2" CONDUIT
#384	17" CONDUIT
#390	17" CONDUIT
#396	17 1/2" CONDUIT
#402	17 1/2" CONDUIT
#408	18" CONDUIT
#414	18" CONDUIT
#420	18 1/2" CONDUIT
#426	18 1/2" CONDUIT
#432	19" CONDUIT
#438	19" CONDUIT
#444	19 1/2" CONDUIT
#450	19 1/2" CONDUIT
#456	20" CONDUIT
#462	20" CONDUIT
#468	20 1/2" CONDUIT
#474	20 1/2" CONDUIT
#480	21" CONDUIT
#486	21" CONDUIT
#492	21 1/2" CONDUIT
#498	21 1/2" CONDUIT
#504	22" CONDUIT
#510	22" CONDUIT
#516	22 1/2" CONDUIT
#522	22 1/2" CONDUIT
#528	23" CONDUIT
#534	23" CONDUIT
#540	23 1/2" CONDUIT
#546	23 1/2" CONDUIT
#552	24" CONDUIT
#558	24" CONDUIT
#564	24 1/2" CONDUIT
#570	24 1/2" CONDUIT
#576	25" CONDUIT
#582	25" CONDUIT
#588	25 1/2" CONDUIT
#594	25 1/2" CONDUIT
#600	26" CONDUIT
#606	26" CONDUIT
#612	26 1/2" CONDUIT
#618	26 1/2" CONDUIT
#624	27" CONDUIT
#630	27" CONDUIT
#636	27 1/2" CONDUIT
#642	27 1/2" CONDUIT
#648	28" CONDUIT
#654	28" CONDUIT
#660	28 1/2" CONDUIT
#666	28 1/2" CONDUIT
#672	29" CONDUIT
#678	29" CONDUIT
#684	29 1/2" CONDUIT
#690	29 1/2" CONDUIT
#696	30" CONDUIT
#702	30" CONDUIT
#708	30 1/2" CONDUIT
#714	30 1/2" CONDUIT
#720	31" CONDUIT
#726	31" CONDUIT
#732	31 1/2" CONDUIT
#738	31 1/2" CONDUIT
#744	32" CONDUIT
#750	32" CONDUIT
#756	32 1/2" CONDUIT
#762	32 1/2" CONDUIT
#768	33" CONDUIT
#774	33" CONDUIT
#780	33 1/2" CONDUIT
#786	33 1/2" CONDUIT
#792	34" CONDUIT
#798	34" CONDUIT
#804	34 1/2" CONDUIT
#810	34 1/2" CONDUIT
#816	35" CONDUIT
#822	35" CONDUIT
#828	35 1/2" CONDUIT
#834	35 1/2" CONDUIT
#840	36" CONDUIT
#846	36" CONDUIT
#852	36 1/2" CONDUIT
#858	36 1/2" CONDUIT
#864	37" CONDUIT
#870	37" CONDUIT
#876	37 1/2" CONDUIT
#882	37 1/2" CONDUIT
#888	38" CONDUIT
#894	38" CONDUIT
#900	38 1/2" CONDUIT
#906	38 1/2" CONDUIT
#912	39" CONDUIT
#918	39" CONDUIT
#924	39 1/2" CONDUIT
#930	39 1/2" CONDUIT
#936	40" CONDUIT
#942	40" CONDUIT
#948	40 1/2" CONDUIT
#954	40 1/2" CONDUIT
#960	41" CONDUIT
#966	41" CONDUIT
#972	41 1/2" CONDUIT
#978	41 1/2" CONDUIT
#984	42" CONDUIT
#990	42" CONDUIT
#996	42 1/2" CONDUIT
#1002	42 1/2" CONDUIT

FOR THREE PHASE APPLICATIONS

DESCRIPTION: 200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline (512-332-2978)

BUILDING OR RESIDENCE

Meter socket and weatherproof main disconnect panel with a single main breaker as defined in the NEC.

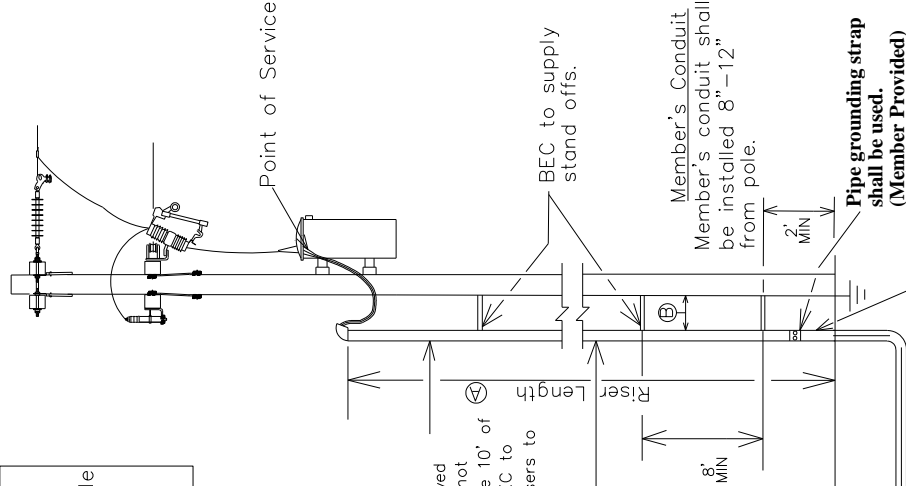

8" ground rod to be driven 12" below grade. (Member Provided)

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

FOR THE MEMBER'S SAFETY, WIRING INSTALLATION AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Latest update can be found at www.bluebonnetelectric.coop




10 OR 30 60-200 AMP METER ON BUILDING OR RACK		Drawn By :	MS COMMITTEE	Checked By :	MS COMMITTEE	Approved By :	MS COMMITTEE
DATE	REVISIONS	CV					
03-29-2018	MOVED DISCONNECT TO THE SIDE OF METER						
11-19-2019	ADDED SOLID COPPER NOTE						
11-04-2021	ADDED MAIN BREAKER NOTE						
Scale :	NONE	Date :	11-04-2021				MS-106

Notes:

- Line taps shall be made in the galvanized wiring trough by the electrical contractor.
- Weatherproof fittings Required.
- (2) disconnects could be substituted with (1) disconnect. All disconnects shall have over current protection installed.
- No more than (2) risers or (2) conductors per phase shall be allowed.
- Wire shall be sized to total name plate disconnect sizes.
- Neutral(s) may be reduced no more than two sizes on residential application. No reduction of the neutral(s) is allowed on commercial application.
- The electrical contractor will notify Bluebonnet 72 hours in advance to schedule Bluebonnet personnel to deliver the CT's before the service wire is pulled. The electrician shall install them on the rack with the correct polarity before the conductor is brought thru the 30"x42" (minimum size) CT enclosure. Call 800-842-7708 to schedule a connect.

- More than (6) main disconnects require a properly sized main disconnect ahead of the galvanized trough.
- Bluebonnet pole must remain free of structures and private attachments other than meter loop riser assembly.
- Meter assembly must remain unenclosed on exterior of structure.
- Type K-4, Bolt-in type meter can: Description: 400 amp, 4 terminals, 3-wire, residential/commercial socket single phase self-contained, large cover plate. These meter cans are available for purchase through Techline (512-332-2978) or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications.
- Maintain 3"-6" distance from the disconnect and the meter can. Member shall use a metal nipple. A straight or offset nipple is acceptable.

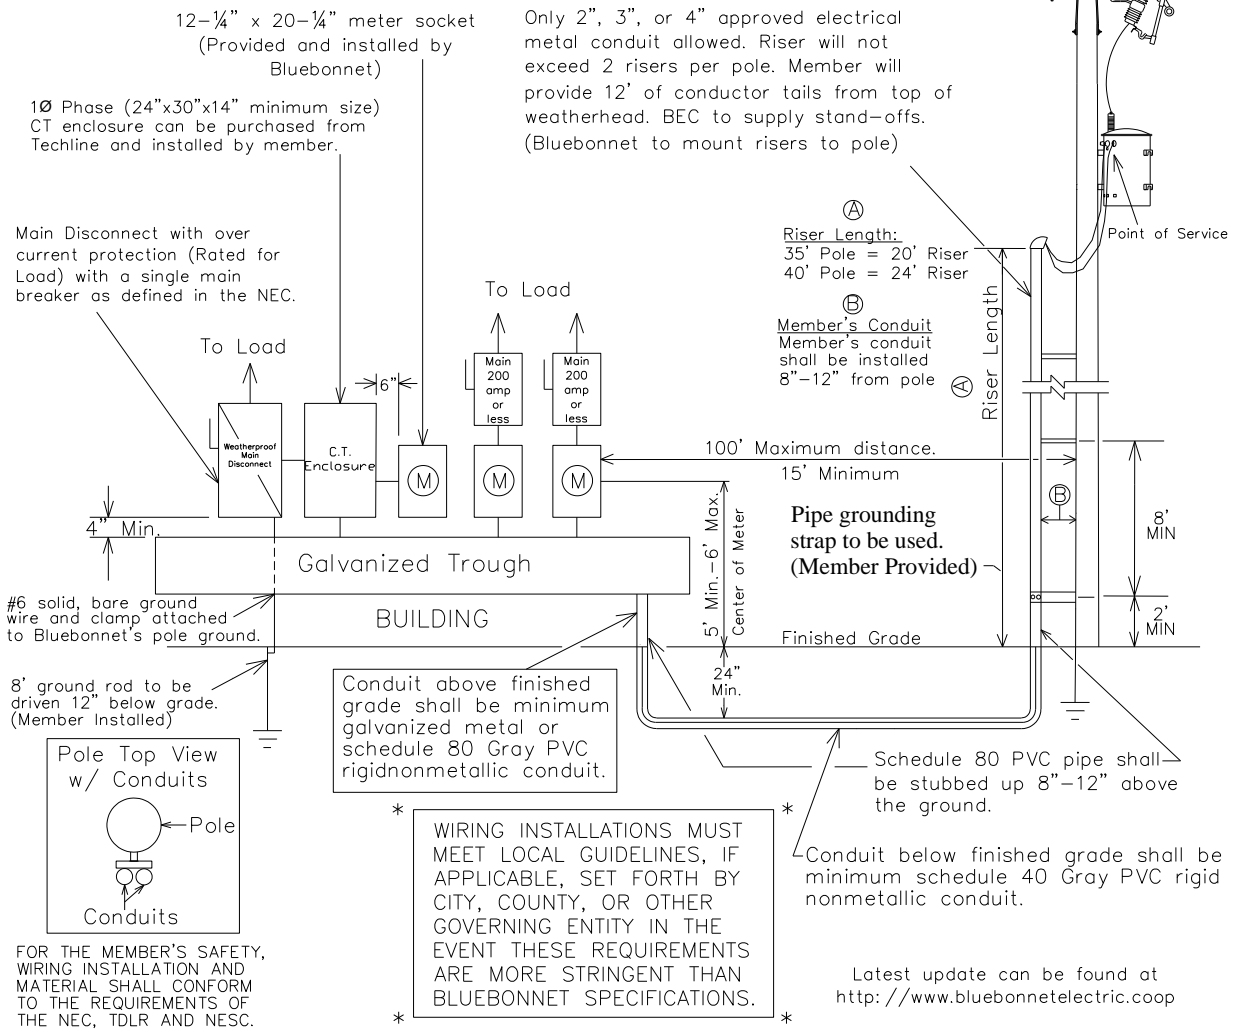

1Ø 400-800 TOTAL AMPS WITH MULTIPLE METERING POINTS ON BUILDING. (RISER TYPE)


DATE	REVISIONS
11-28-2017	Bold lettering of Pipe grounding Strap
11-19-2019	Added Solid Copper Note.
04-19-2021	Changed the size of the CT Meter Can requirements.
11-04-2021	Added Main Breaker Note



Drawn By : RG	Checked By : MS COMMITTEE	Approved By : MS COMMITTEE
Scale : NONE	Date : 11-04-2021	MS-114A1

Single Phase Transformer Layout

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENT OF STANDARD WIRE SIZE. (RHH, RHW, THW, THWN, THHN, AND XHHW) REFER TO NEC FOR OTHER CALCULATIONS.	
COPPER CONDUCTOR	
WIRE SIZE	CONDUIT/NIPPLE SIZE
#6	1 1/4" CONDUIT
#4	1 1/2" CONDUIT
#2	2" CONDUIT
#1	2" CONDUIT
#2/0	2" CONDUIT
ALUMINUM CONDUCTOR	
WIRE SIZE	CONDUIT/NIPPLE SIZE
#4	1 1/4" CONDUIT
#2	1 1/2" CONDUIT
#1/0	2" CONDUIT
#2/0	2" CONDUIT
#4/0	2" CONDUIT

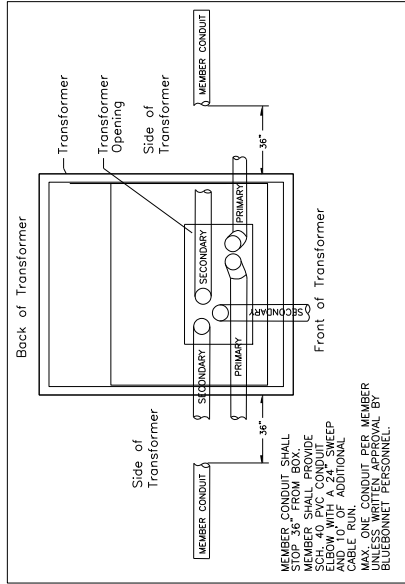

Notes:

- Weatherproof fittings required.
- For all URD jobs, electricians shall call TEXAS811 for locates before digging to Bluebonnet equipment. No private utilities will be located.
- Shall install on additional 10' of wire for termination.
- Main disconnect shall have a single main breaker as defined in the NEC.
- Neutral may be reduced no more than two sizes on residential application. No reduction of the neutral is allowed on commercial application.
- Metering point must remain unenclosed on exterior of structure.
- Metering point can not be mounted on the side of a mobile home.
- All connections inside pad mounted transformer and UJB's will be made by Bluebonnet.
- THREE PHASE APPLICATIONS ONLY DESCRIPTION: 200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Giddings(979-542-8657), Brentham (979-277-7240), Red Rock (512-332-2978)
- Member must contact Bluebonnet to determine where the secondary conduit is to be run to the transformer. Conduit to be installed 36" to the side of transformer. Call 800-842-7708 to schedule an appointment.
- Member/Electrician shall coordinate with Bluebonnet personal to install all conduit and the pulling of the secondary wire to the transformer. Member/Electrician shall notify Bluebonnet 48 hours in advance to schedule a time/date to perform the work.
- If additional trips are made to the site by Bluebonnet personnel, applicable fees may be applied.

Conduit above finished grade shall be minimum galvanized metal or schedule 80 Gray PVC rigid nonmetallic conduit.

Latest update can be found at www.bluebonnetelectric.coop

200 amp meter socket and weatherproof main disconnect.

Weather Proof Disconnect

Equipment rack 2" steel pipe with horizontal uni-strut supports.

Center of meter

12"

Min.

Max

24" Minimum

To Load

8" Min. Dia.

8' ground rod to be driven 12" below grade.

#6 solid, bare ground wire and clamp attached to Bluebonnet's pole ground.

Conduit below finished grade from underground transformer (or UJB) shall be minimum schedule 40 Gray PVC rigid nonmetallic conduit.

Available 2" or 3" service conduit stub outs could exist on facilities installed after November, 2009. Older installations will require the installation of members conduit and elbow by Bluebonnet at transformer. If stub out does not match members conduit then member shall provide a new stub out or reducer.

Finished Grade

Min.

24" Minimum

3000psi Conc.

Transformer (or UJB)

Point of service Transformer secondary bushings.

Front of Transformer

WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES. IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS.

Bluebonnet primary (or secondary) cable


FOR THE MEMBER'S SAFETY, WIRING INSTALLATIONS SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.



Drawn By :	CV	Checked By :	MS COMMITTEE	Approved By :	MS COMMITTEE
Scale :	NONE	Date :	11-04-2021		MS-201

Notes:

- Line taps shall be made in the galvanized wiring trough by the electrical contractor. The electrical contractor will notify Bluebonnet 72 hours in advance to schedule Bluebonnet personnel to deliver the CT's before the service wire is pulled. The electrician shall install the CT's on the rack with the correct polarity before the conductor is brought thru the 30"x42" minimum size CT enclosure, call 800-842-7708 to schedule a connect.
- Wire shall be sized to total name plate disconnect sizes.
- Neutral(s) may be reduced no more than two sizes on residential application. No reduction of the neutral(s) is allowed on commercial application.
- For all URD jobs, electricians shall call TEXAS811 for locates before digging to Bluebonnet equipment. No private utilities will be located.
- Cooperative will complete wiring into transformer. Have an additional 10' of wire for termination.
- More than (6) main disconnects require a properly sized main disconnect ahead of the galvanized trough.
- Weatherproof fittings required.
- Meter assembly must remain unenclosed on exterior of structure.
- All connections inside pod mounted transformer will be made by Bluebonnet. **THREE PHASE APPLICATIONS ONLY DESCRIPTION:**
- 200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline (512-332-2978).
- Member/Electrician shall coordinate with Bluebonnet personnel to install all conduit and the pulling of the secondary wire to the transformer. Member/Electrician shall notify Bluebonnet 48 hours in advance to schedule a time/date to perform the work. If additional trips are made to the site by Bluebonnet personnel, applicable fees may be applied.
- Maintain 3"-6" distance between the disconnect and the meter can.
- Member shall use a metal nipple. A straight or offset nipple is acceptable.

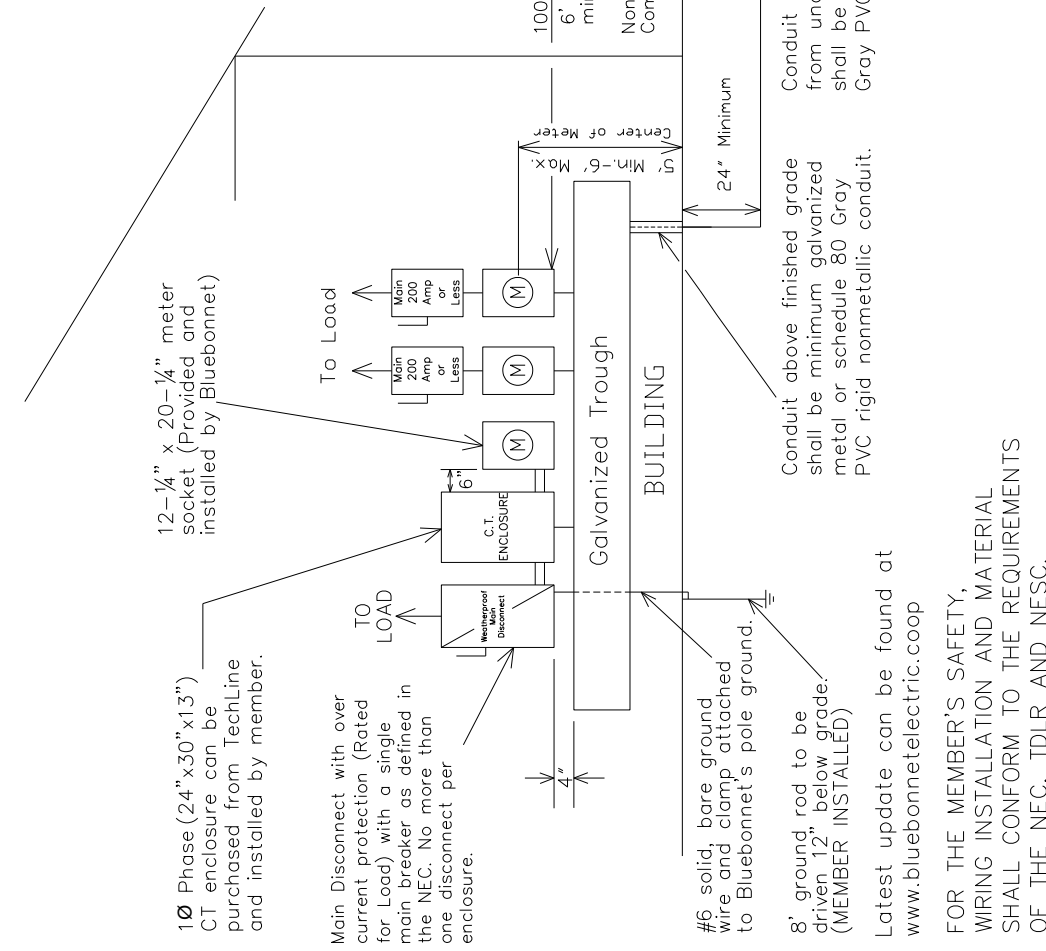

WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS.



<p>1 PHASE >400 AMP UNDERGROUND WITH MULTIPLE METERING POINTS AND CT METERING ON BUILDING.</p>	<p>Drawn By : RG</p>	<p>Checked By : MS COMMITTEE</p>	<p>Approved By : MS COMMITTEE</p>
	<p>Scale : NONE</p>	<p>Date : 11-04-2021</p>	<p>MS-202A1</p>
<p>DATE REVISIONS</p> <p>04-19-2021 Changed the size of the CT Meter Con requirements.</p> <p>11-04-2021 Added Main Breaker Note</p>			



FOR THE MEMBER'S SAFETY, WIRING INSTALLATION AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Notes:

- Line taps shall be made in the galvanized wiring trough by the electrical contractor.
- The electrical contractor will notify Bluebonnet 72 hours in advance to schedule Bluebonnet personnel to deliver the CT's before the service wire is pulled. The electrician shall install the CT's on the rock with the correct polarity before the conductor is brought thru the 30"x42" minimum size CT enclosure, call 800-842-7708 to schedule a connect.
- Wire shall be sized to total name plate disconnect sizes.
- Neutral(s) may be reduced no more than two sizes on residential application. No reduction of the neutral(s) is allowed on commercial application. For all URD jobs, electricians shall call TEXAS311 for locates before digging to Bluebonnet equipment. No private utilities will be located.
- Cooperative will complete wiring into transformer. Have an additional 10' of wire for termination.
- More than (6) main disconnects require a properly sized main disconnect ahead of the galvanized trough.
- Weatherproof fittings required.
- Meter assembly must remain unenclosed on exterior of structure.
- All connections inside pad mounted transformer will be made by Bluebonnet.
- THREE PHASE APPLICATIONS ONLY DESCRIPTION:
200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline (512-332-2978).
- Member/Electrician shall coordinate with Bluebonnet personnel to install all conduit and the pulling of the secondary wire to the transformer. Member/Electrician shall notify Bluebonnet 48 hours in advance to schedule a time/date to perform the work.
- If additional trips are made to the site by Bluebonnet personnel, applicable fees may be applied.
- Maintain 3"-6" distance between the disconnect and the meter can. Member shall use a metal nipple. A straight or offset nipple is acceptable.

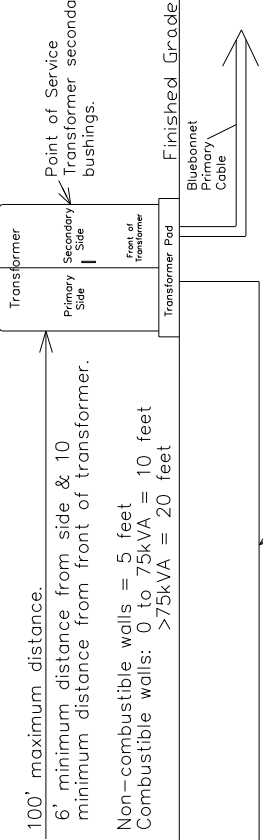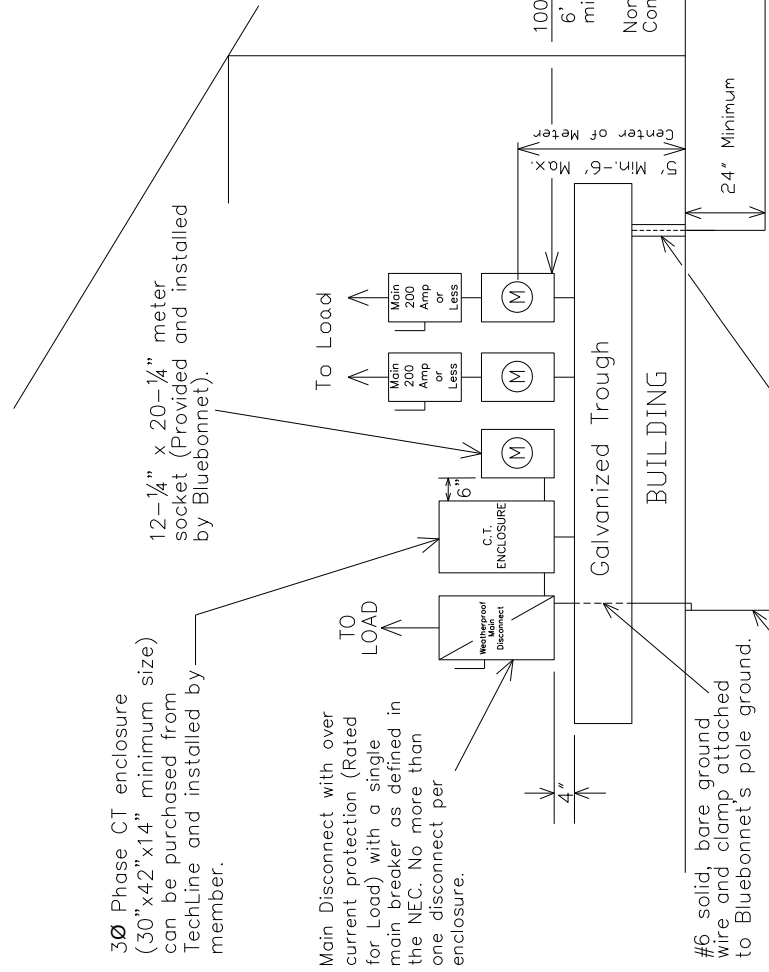

100' maximum distance.
6' minimum distance from side & 10' minimum distance from front of transformer.
Non-combustible walls = 5 feet
Combustible walls: 0 to 75kVA = 10 feet
>75kVA = 20 feet

Conduit below finished grade from underground transformer shall be minimum schedule 40 Gray PVC rigid nonmetallic conduit.

Conduit above finished grade shall be minimum galvanized metal or schedule 80 Gray PVC rigid nonmetallic conduit.

WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS.

3Ø Phase CT enclosure (30" x 42" x 14" minimum size) can be purchased from TechLine and installed by Bluebonnet member.

12-1/4" x 20-1/4" meter socket (Provided and installed by Bluebonnet).

Main Disconnect with over current protection (Rated for Load) with a single main breaker as defined in the NEC. No more than one disconnect per enclosure.

4"

6"

To LOAD

To LOAD

To LOAD

To LOAD

Weatherproof Disconnect

C.T. ENCLOSURE

Galvanized Trough

24" Minimum

Center of Meter

Min. 6" Max.

100' maximum distance.

6' minimum distance from side & 10' minimum distance from front of transformer.

Non-combustible walls = 5 feet

Combustible walls: 0 to 75kVA = 10 feet

>75kVA = 20 feet

Conduit below finished grade from underground transformer shall be minimum schedule 40 Gray PVC rigid nonmetallic conduit.

Conduit above finished grade shall be minimum galvanized metal or schedule 80 Gray PVC rigid nonmetallic conduit.

#6 solid, bare ground wire and clamp attached to Bluebonnet's pole ground.

8' ground rod to be driven 12" below grade. (MEMBER INSTALLED)

Latest update can be found at www.bluebonnetelectric.coop


FOR THE MEMBER'S SAFETY, WIRING INSTALLATION AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

	3 PHASE >200 AMP UNDERGROUND WITH MULTIPLE METERING POINTS AND CT METERING ON BUILDING.		Drawn By : RG	Checked By : MS COMMITTEE	Approved By : MS COMMITTEE
	DATE	REVISIONS	Scale : NONE	Date : 11-04-2021	MS-202B3
	04-19-2021	Removed Single Phase from the CT Enclosure Note.			
	11-04-2021	Added Main Breaker Note			

Notes:


1. Main disconnect panel may not be used as an electrical race way.
2. Line taps shall be made by the electrical contractor if a galvanized wiring trough is used.
3. Weatherproof fittings required.
4. Any combination of six disconnects totaling no more than 400 amps can be used. REF: NEC, SEC 230.71
5. Recommended wire size is either parallel 2/0 THHN copper or parallel 4/0 THHN aluminum.
6. Neutrals may be reduced no more than two sizes on residential applications. No reduction of the neutrals is allowed on commercial applications.
7. Member shall install an additional of 10' wire for termination.
8. Weatherproof main disconnect panels shall have a single main breaker or 6-handled main as defined in the NEC.
9. Metering point must remain unenclosed on exterior of structure.
10. Metering cannot be mounted on the side of a mobile home.

* **WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS.** *

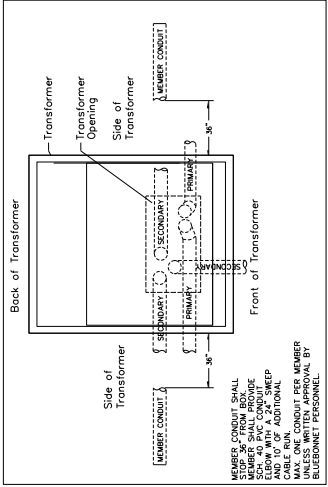

Latest update can be found at www.bluebonnetelectric.coop

Landis & Gyr, Type K-4, Description: 400 amp, 4 terminals, 3 wire, residential/commercial socket single phase self-contained, large coverplate. The meter lugs can accommodate up to 500 MCM. These meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline phone numbers; Red Rock (512-332-2978).

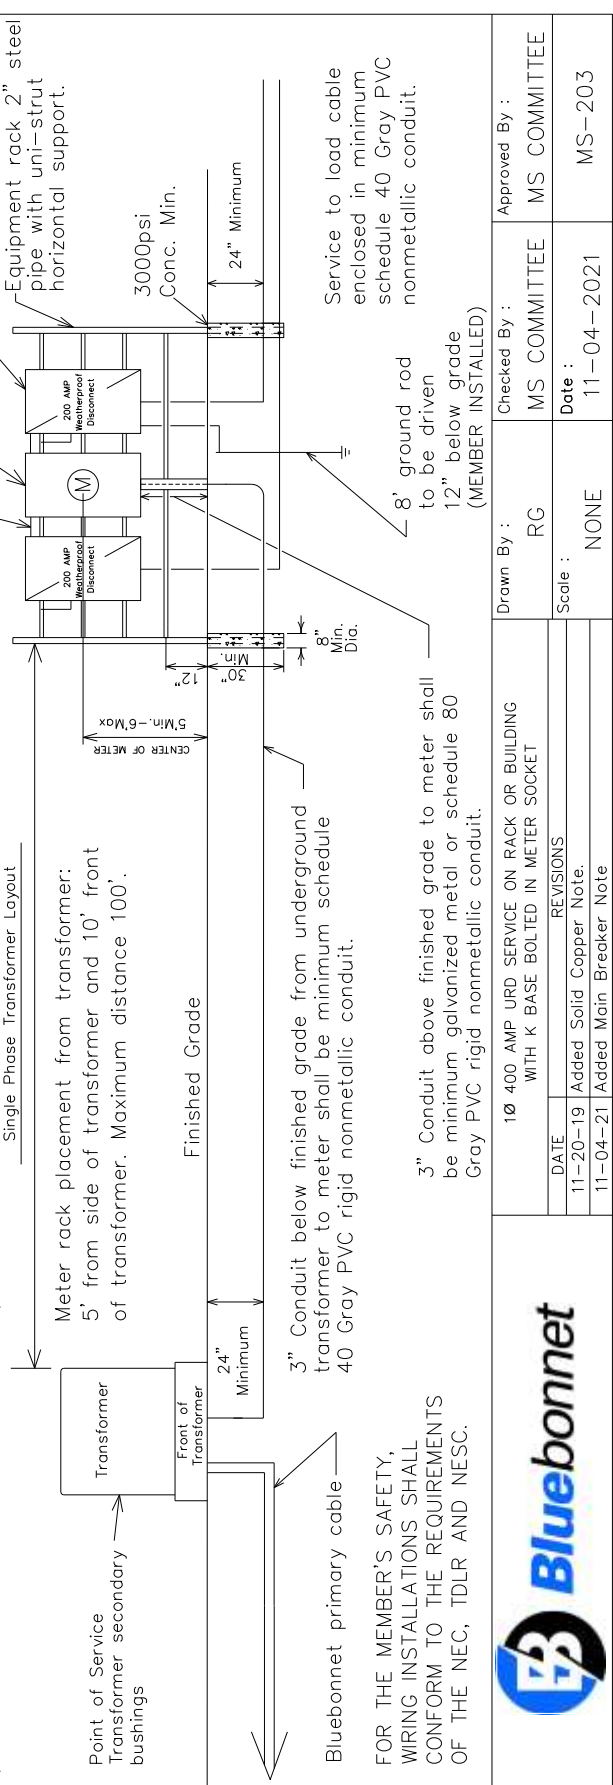

FOR THE MEMBER'S SAFETY, WIRING INSTALLATIONS SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.



1Ø 400 AMP URD SERVICE ON RACK OR BUILDING WITH K BASE BOLTED IN METER SOCKET		Checked By :	MS COMMITTEE	MS COMMITTEE
DATE	REVISIONS	Drawn By :	RG	
11-20-19	Added Solid Copper Note.	Scale :	NONE	
11-04-21	Added Main Breaker Note	Date :	11-04-2021	MS-203

Notes:


1. Line taps shall be made in the galvanized trough by the electrical contractor.
2. Weatherproof fittings required.
3. Two disconnects could be substituted with (1) disconnect. All disconnects shall have over current protection.
4. Wire shall be sized to total disconnect sizes.
5. Neutral(s) may be reduced no more than two sizes on residential application. No reduction of the neutral(s) is allowed on commercial application.
6. Member shall contact Bluebonnet Electric to determine the secondary conduit location. Conduit to be installed 36" to the side of transformer. Call 800-842-7708 to schedule an appointment.
7. Bluebonnet will complete wiring into transformer. Have sufficient amount of wire for termination. Member shall install an additional 10' of wire for termination.
8. All secondary connections to be made inside transformer by Bluebonnet.
9. Bluebonnet to provide the CT's.
10. Meter assembly must remain unenclosed on exterior of structure.
11. Member/Electrician shall coordinate with Bluebonnet personnel to install all conduit and the pulling of the secondary wire to the transformer.
12. Member/Electrician shall notify Bluebonnet 48 hours in advance to schedule a time/date to perform the work.
13. If additional trips are made to the site by Bluebonnet personnel, applicable fees may be applied.
14. Maintain 3"-6" distance between the disconnect and the meter can. Member shall use a metal nipple. A straight or offset nipple is acceptable.

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

FOR THE MEMBER'S SAFETY, WIRING INSTALLATION AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Three phase application, the CT's & meter can be located on/in the transformer.

Non-combustible walls = 5 feet
Combustible walls: 0 to 75kVA = 10 feet
>75kVA = 20 feet

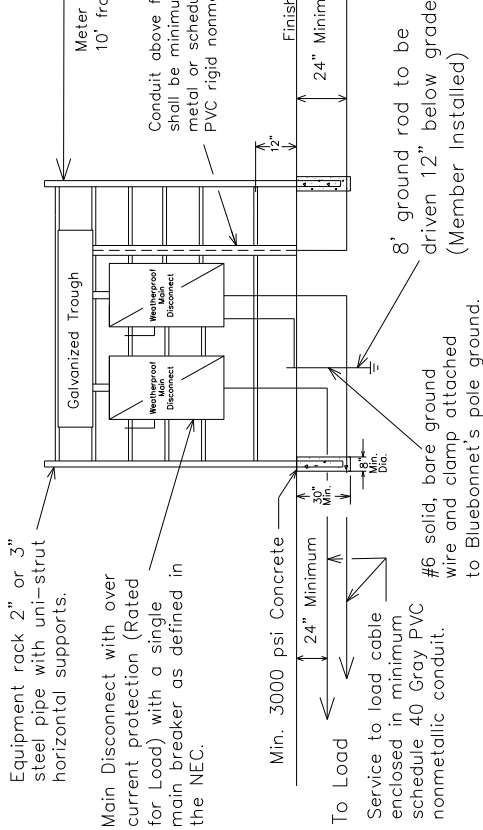

Conduit above finished grade shall be minimum galvanized metal or schedule 80 Gray PVC rigid nonmetallic conduit.

Conduit below finished grade from underground transformer shall be minimum schedule 40 rigid nonmetallic conduit.

Latest update can be found at www.bluebonnetelectric.coop



3 PHASE >200 AMP UNDERGROUND SERVICE WITH DISCONNECT ON RACK OR BUILDING

DATE	REVISIONS
11-20-19	Added Solid Copper Note.
11-04-21	Added Main Breaker Note

Drawn By : RG

Checked By : MS COMMITTEE


Approved By : MS COMMITTEE

Scale : NONE

Date : 11-04-2021

MS-204A3

Single Phase Transformer Layout

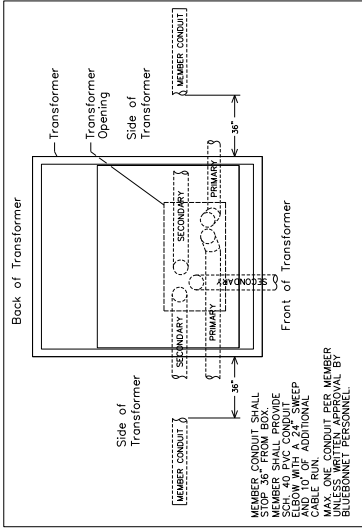


Notes:

- Line taps shall be made in the galvanized trough by the electrical contractor.
- More than (6) main disconnects require a properly sized main disconnect ahead of the galvanized trough.
- Weatherproof fittings required.
- Wire shall be sized to total disconnect sizes.
- Neutral(s) may be reduced no more than two sizes on residential application. No reduction of the neutral(s) is allowed on commercial or all URD jobs, electricians shall call TEXAS811 for locates before digging to Bluebonnet equipment. No private utilities will be located. Additional amount of wire for termination.
- Bluebonnet will complete wiring into transformer. Have 10' Meter loop must remain unenclosed on exterior of structure.
- Meter loop can not be mounted on the side of a mobile home.
- All secondary connections made by Bluebonnet.
- THREE-PHASE APPLICATIONS ONLY DESCRIPTION: 200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cons are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Giddings 979-542-8657, Red Rock 512-332-2978, Brenham 979-277-7240.
- Member/Electrician shall coordinate with Bluebonnet personal to install all conduit and the pulling of the secondary wire to the transformer. Member/Electrician shall notify Bluebonnet 48 hours in advance to schedule a time/date to perform the work.
- If additional trips are made to the site by Bluebonnet personnel, applicable fees may/are applied.

FOR THE MEMBER'S SAFETY, WIRING INSTALLATIONS SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

No more than four 60-200 Amp meter sockets and weatherproof main disconnects. No more than one disconnect per enclosure.

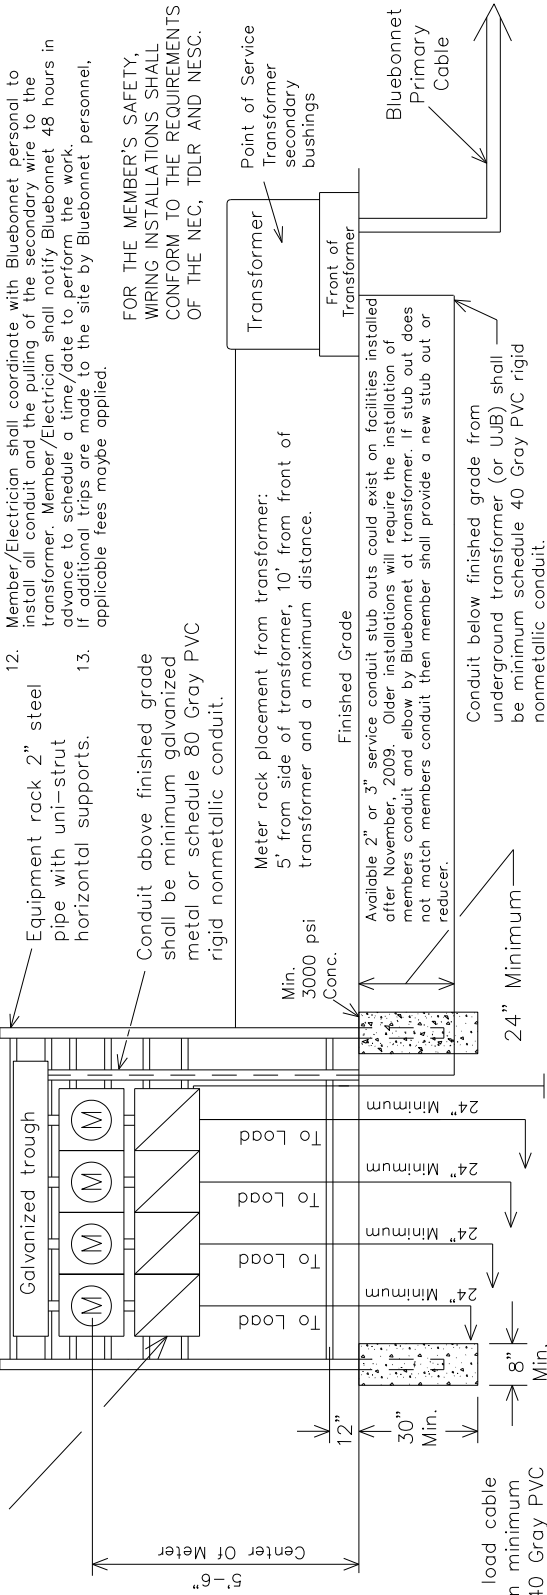

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENT OF STANDARD WIRE SIZE. REFER TO NEC FOR OTHER CALCULATIONS.

COPPER CONDUCTOR		ALUMINUM CONDUCTOR	
WIRE SIZE	CONDUIT/NIPPLE SIZE	WIRE SIZE	CONDUIT/NIPPLE SIZE
#6	1/4" CONDUIT	#4	1/4" CONDUIT
#4	1/2" CONDUIT	#2	1/2" CONDUIT
#2	3/4" CONDUIT	#1/0	1/2" CONDUIT
#1	1" CONDUIT	#2/0	3/4" CONDUIT
#1/0	1 1/4" CONDUIT	#3/0	1" CONDUIT
#2/0	1 3/4" CONDUIT	#4/0	1 1/4" CONDUIT

10 OR 30 60-200 AMP UNDERGROUND GANG MOUNTED METERS ON RACK OR BUILDING NOT TO EXCEED A TOTAL OF 800 AMPS.	Drawn By : RG	Checked By : MS COMMITTEE	Approved By : MS COMMITTEE
DATE REVISIONS	Scale : NONE	Date : 11-04-2021	MS-205
12-07-2017 ADDED WIRE SIZING CHART.			
12-07-2017 ADDED MAIN BREAKER NOTE			




Latest update can be found at www.bluebonnetelectric.coop

Notes:

1. All temporary wiring shall meet national electrical code standards.
2. All outlets attached to meter loop shall have ground-fault circuit interrupter protection.
3. For all URD jobs, electricians shall call TEXAS811 for locates before digging to Bluebonnet equipment.
4. No private utilities will be located. Service wires shall be brought to the top side of the meter base.
5. Bluebonnet does inspect temporary meter loops and a fee shall be charged per trip for wiring inspection. Bluebonnet will refuse service if hazardous conditions exist and/or if connections do not meet specifications. Bluebonnet will complete wiring into transformer or UJB. Member shall have sufficient amount of wire for termination.
6. All connections inside pad mounted transformer and UJB's will be made by Bluebonnet.
7. Temporary Meter Loop Services are good for up to 24 months of service or less.

* * *
WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS.
 * * *

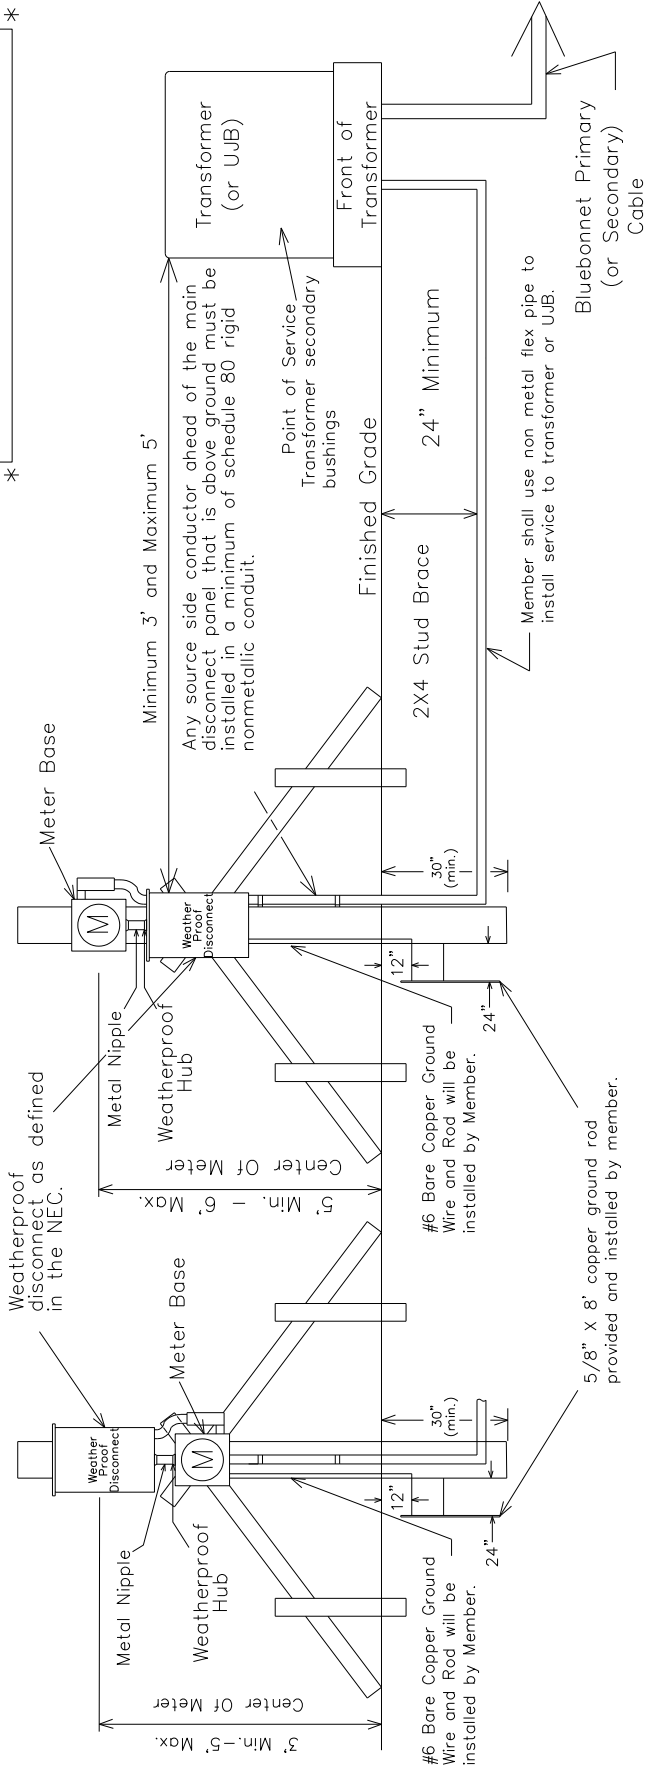

FOR MEMBER SAFETY, WIRING INSTALLATION AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Latest update can be found at www.bluebonnetelectric.coop

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENT OF STANDARD WIRE SIZE
 (RHH, RHW, THW, THWN, THHN, AND XHHW)
 REFER TO NEC FOR OTHER CALCULATIONS.

COPPER CONDUCTOR		ALUMINUM CONDUCTOR	
WIRE SIZE	BREAKER SIZE	WIRE SIZE	BREAKER SIZE
#6	60 AMP	#4	60 AMP
#4	100 AMP	#2	100 AMP
#2	125 AMP	#1/0	125 AMP
#1	150 AMP	#2/0	150 AMP
#2/0	200 AMP	#4/0	200 AMP

TEMPORARY METER LOOP FOR UNDERGROUND SERVICE

DATE	REVISIONS
03-29-2018	ADDED ADDITIONAL METER SETUP.
11-04-2021	ADDED MAIN BREAKER NOTE

Drawn By : RG
 Checked By : MS COMMITTEE
 Approved By : MS COMMITTEE

Scale : NONE
 DATE: 11-04-2021
 MS-302

Notes:

1. All pole mounted meter loops shall be mounted to Bluebonnet poles.
2. All secondary connections made by Bluebonnet.
3. All outlets attached to meter loop shall have ground-fault circuit interrupter protection.
4. Temporary Meter Loop Services are good for 24 months of service or less
5. For your safety, only Bluebonnet personnel are authorized to install meter loops or other BEC equipment on a Bluebonnet pole. Members shall have loop assembled and available for installation by Bluebonnet.


Bluebonnet does inspect temporary meter loops and a fee shall be charged per trip for wiring inspections. Bluebonnet will deny service if hazardous conditions do not meet specifications.

* WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. *

Point of Service

FOR THREE PHASE APPLICATIONS

DESCRIPTION:
200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, or NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline (512-332-2978)

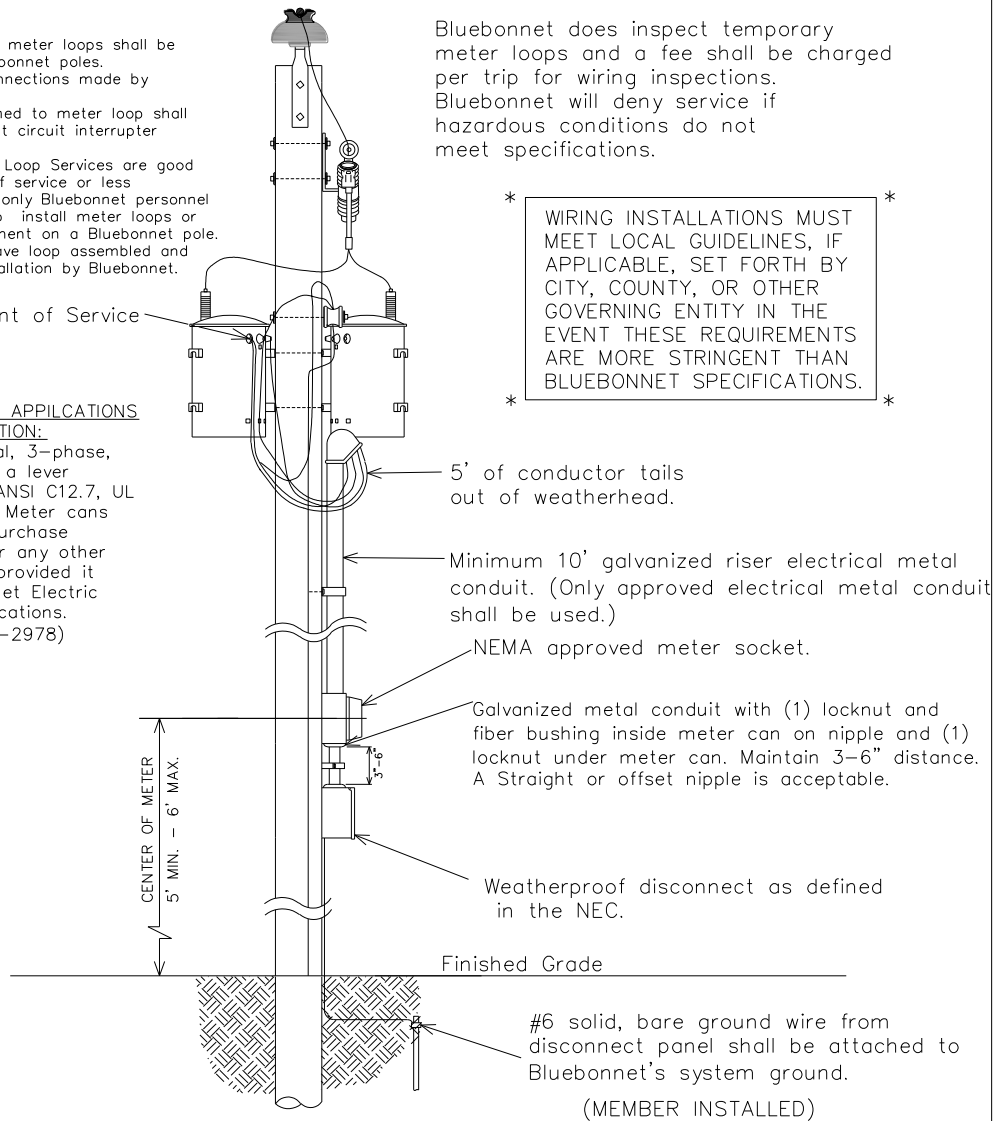

FOR THE MEMBER'S SAFETY, WIRING INSTALLATION AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

Latest update can be found at www.bluebonnetelectric.coop

CURRENT CARRYING CAPACITIES AND CONDUIT SIZE REQUIREMENT OF STANDARD WIRE SIZE - (RHH, RHW, THW, THWN, THHN, AND XHHW) REFER TO NEC FOR OTHER CALCULATIONS.

COPPER CONDUCTOR			ALUMINUM CONDUCTOR		
Wire Size	Breaker Size	Conduit Size	Wire Size	Breaker Size	Conduit Size
#6	60 Amp	1¼" Conduit	#4	60 Amp	1¼" Conduit
#4	100 Amp	1¼" Conduit	#2	100 Amp	1¼" Conduit
#2	125 Amp	1½" Conduit	#1/0	125 Amp	1½" Conduit
#1	150 Amp	2" Conduit	#2/0	150 Amp	2" Conduit
#2/0	200 Amp	2" Conduit	#4/0	200 Amp	2" Conduit

1Ø OR 3Ø 60-200 AMP TEMPORARY METER LOOP FOR TRANSFORMER AND SERVICE POLES



DATE		REVISIONS		Drawn By :	Checked By :	Approved By :
03-31-20		Added note 5.		RG	MS COMMITTEE	MS COMMITTEE
11-04-21		Added main breaker note		Scale :	DATE:	MS-303
				NONE	11-04-2021	

Material Standards:



Underground warning tape must be 6” width, RED in color with BLACK lettering, and read “Caution Buried Electric Underground”. *Normally, this material is only sold in 1000’ rolls.*



MEMBER RESPONSIBILITY

BLUEBONNET RESPONSIBILITY

<p>Deliver essential project documents to Bluebonnet Electric Coop. - Site plan files (CAD Format), load information, information request form(s), project schedule.</p>	<p>BEFORE THE CLOCK STARTS</p>	<p>Facilitate correspondence with member/developer to discuss needs and review available information.</p>
<p>Host a site visit and/or Pre-design Meeting/Call with Bluebonnet Representative(s). Provide up to date and accurate Project Schedule for all stages, including desired energization date.</p> <p>**Bluebonnet Electric cannot begin design of project until all required documentation is received.**</p>		<p>Provide Bluebonnet Developer's Package (Commercial/Residential); including standard Bluebonnet Easement.</p>
		<p>Collect information from Member/Developer.</p>
		<p>Verify a complete member package has been received, including all required documentation.</p>
	<p>WEEK #1</p>	<p>Attend site visit or Pre-design meeting, evaluate site layout, utility coordination, member construction coordination, jobsite construction access, etc.</p>
<p>**Bluebonnet Electric cannot begin construction of project until Site Ready documentation is received.**</p>	<p>WEEKS #2-#5</p>	<p>Design electric service layout; coordinate with the electric system (circuit capacity, fuses). Size equipment, determine rate class for Community Representative to communicate to Member.</p>
	<p>WEEKS #6-#7</p>	<p>Prepare and submit any necessary permits. Schedule and complete field staking of project. Finalize and secure all easements.</p>
	<p>WEEK #8</p>	<p>Create cost estimate and deposit and send cost letter and Site Ready Letter to developer.</p>
<p>Expedite payment to Bluebonnet Electric for project. Provide any required third party easements and outstanding information.</p>	<p>WEEK #9</p>	
<p>**Bluebonnet Electric will not release project for scheduling (apartments and subdivisions) until addressing information is received.**</p>	<p>WEEKS #10-#11</p>	<p>Process project payment.</p>
<p>**Bluebonnet Electric cannot begin construction of project until Site Ready documentation is received.**</p>	<p>WEEK #12</p>	<p>Prepare for and release project to construction. Verify material availability and receipt of developer's Site Ready Letter.</p>
<p>Construction crews will leave the site if suitable construction conditions are unsatisfactory.</p>	<p>WEEKS #13-#28</p>	<p>Upon release, Construction Lead (Contract Coordinator or Bluebonnet Construction) will contact member within two business days to provide anticipated construction start date, duration, planned completion, etc.</p>
<p>Member completes preparation for final electric service delivery.</p>		<p>Request crew scheduling from construction. Complete inspections and accept installations. Verify site is prepared and ready for construction.</p>
		<p>Construct Bluebonnet Electric Facilities.</p>
<p>Member requests initiation of final electric service.</p>	<p>WEEKS #29-#30</p>	<p>Inspect final installation. Energize project and initiate electric service.</p>

- A. If a Member step is late, the project clock **STOPS**. Members/Developers are highly encouraged to stay on top of payments, required easements, and all crucial deliverables and documentation.
- B. Elapsed times are not a guarantee. More than thirty weeks may be needed for larger scope projects or projects that require significant upgrades to Bluebonnet Electric's system infrastructure.
- C. Member/Developer is required to provide Bluebonnet Electric with any and all required easements, including third party, prior to commencing construction.
- D. Bluebonnet Engineering staff are responsible for all steps from project inception through Week #12. Weeks #13 - #30 are managed by Bluebonnet Construction Staff and are denoted in **BLUE**.
- E. Permitting schedule is contingent on regulatory agency approval (response times vary).
- F. Member/Developer is required to notify construction once site is ready by returning a signed Site Ready Letter. **Projects will not be released for scheduling until this document has been returned.**

During the **planning, engineering, and design phase** of your project your main point of contact will be one of Bluebonnet's Project Coordinators. If the Project Coordinator for your project is not available, one of the other team members will be glad to assist you.

Shawn Ely
 shawn.ely@bluebonnet.coop
 Office: (979) 542-8518
 Cell: (979) 540-7361

Rodney Gerik
 rodney.gerik@bluebonnet.coop
 Office: (979) 542-8527
 Cell: (979) 540-8814

Clemente Verastegui
 clemente.verastegui@bluebonnet.coop
 Office: (979) 542-8542
 Cell: (512) 578-6393

Scott Iselt
 scott.iselt@bluebonnet.coop
 Office: (979) 542-8522
 Cell: (979) 540-0195

Shane Mathison
 shane.mathison@bluebonnet.coop
 Office: (979) 542-8540
 Cell: (512) 577-6817

Thomas Ellis (Manager)
 thomas.ellis@bluebonnet.coop
 Office: (979) 542-8545
 Cell: (979) 540-6146

Dalton Voight
 dalton.voight@bluebonnet.coop
 Cell: (512) 629-3771

Jorge Varillas
 jorge.varillas@bluebonnet.coop
 Office: (512) 764-2838
 Cell: (512) 376-8291

Wyatt Rosenauer
 wyatt.rosenauer@bluebonnet.coop
 Office: (979) 542-8665
 Cell: (512) 629-5924

During the **construction, inspection, and metering phase** of your project your main point of contact will be Bluebonnet's Contractor Coordinator OR Assistant Superintendent. Bluebonnet's personnel cover specific areas of the service territory; areas are listed with their contact information.

Joey Tobola (Contractors)
 joey.tobola@bluebonnet.coop
 Cell: (979) 540-7162

Randall Bownds (Giddings Area)
 randall.bownds@bluebonnet.coop
 Office: (979) 542-8516
 Cell: (979) 540-6418

Chad Lewis (Brenham Area)
 chad.lewis@bluebonnet.coop
 Office: (979) 277-8558
 Cell: (979) 277-4041

Aaron Seeliger (Red Rock Area)
 aaron.seeliger@bluebonnet.coop
 Office: (512) 764-2788
 Cell: (512) 227-2281

Kenneth Roush (Underground – All Areas)
 kenneth.roush@bluebonnet.coop
 Cell: (512) 468-5088

Tim Mittasch (Underground- All Areas)
 tim.mittasch@bluebonnet.coop
 Cell: (979) 540-7159

Daniel Fritsche (Bastrop Area)
 daniel.fritsche@bluebonnet.coop
 Office: (979) 542-8514
 Cell: (979) 542-8546

Carl Miller (Underground Inspector)
 carl.miller@bluebonnet.coop
 Cell: (979) 540-6495

Joe Hernandez (Underground Inspector)
 jose.hernandez@bluebonnet.coop
 Cell: (720) 670-7299

Jose Villarreal (Underground Inspector)
 jose.villarreal@bluebonnet.coop
 Cell: (512) 988-1885

Martin Dorantes (Underground Inspector)
 martin.dorantes@bluebonnet.coop
 Cell: (512) 748-4453